

fabb[®]
catalog

COLLECTION

LEATHER-LIKE

| | |
|--------|---|
| AZAR | 2 |
| CORTES | 3 |
| YUMA | 4 |
| PAMERO | 5 |
| TARHE | 6 |
| WATUSI | 7 |
| HOGAN | 8 |

STRUCTURAL

| | |
|--------|----|
| BALDAR | 25 |
| BJORN | 26 |
| ARNE | 27 |
| BREGO | 28 |
| FJORD | 29 |
| VARDO | 30 |
| HEVRE | 31 |
| NOLIO | 32 |
| RAGO | 33 |
| HYPER | 34 |
| TED | 35 |
| LUMOS | 36 |
| LORD | 37 |
| SONIC | 38 |
| HYDRA | 39 |

CHENILLE/VELOUR/ARTIFICIAL FUR

| | |
|----------|----|
| THOR | 9 |
| BLUVEL | 10 |
| SVEN | 11 |
| ODIN | 12 |
| HAVANA | 13 |
| MAVEL | 14 |
| LAPIT | 15 |
| RAVEN | 16 |
| HAGA | 17 |
| VITO | 18 |
| VOSS | 19 |
| CENTAURI | 20 |
| LOTTA | 21 |
| LINO | 22 |
| VELO | 23 |
| VIVALDI | 24 |

FLAT WEAVES

| | |
|--------|----|
| NORN | 40 |
| COMO | 41 |
| GANDAR | 42 |
| DILJA | 43 |
| YUCA | 44 |
| SAVIO | 45 |
| OTIS | 46 |
| COLET | 47 |
| NEA | 48 |

LEATHER-LIKE

AZAR

PFC free
no perfluorocarbon

OEKO
TEX®

STANDARD
100
SH015 129432
TESTEX



WEIGHT

240g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

70N/80N



TENSILE STRENGTH-WARP/WEFT

780N/510N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4mm/4mm





CORTES

PFC free
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT
330g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
100%PES



ABRASION RESISTANCE
35 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
3-4



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4




TEAR GROWTH RESISTANCE-WARP/WEFT
71N/25N














TENSILE STRENGTH-WARP/WEFT
830N/275N

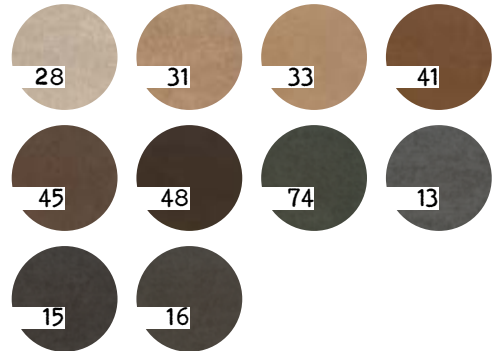












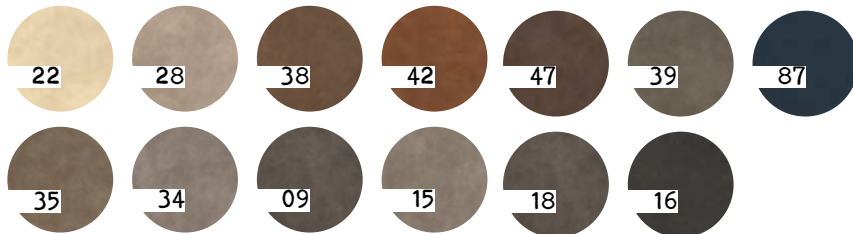
RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3mm/3mm



YUMA

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 310g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100%PES |
|  | ABRASION RESISTANCE |
| | 40 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 3-4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 50N/28N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 950N/370N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 3mm/3mm |



-  WEIGHT
190g/m² ± 5%
-  WORKING WIDTH OF ROLL
minimum 140 cm
-  COMPOSITION
100%PES
-  ABRASION RESISTANCE
40 000
-  PILLING RESISTANCE
4
-  COLOUR FASTNESS TO LIGHT
4
-  COLOUR FASTNESS TO DRY RUBBING
4
-  COLOUR FASTNESS TO WET RUBBING
4
-  TEAR GROWTH RESISTANCE-WARP/WEFT
45N/45N
-  TENSILE STRENGTH-WARP/WEFT
400N/400N
-  RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3mm/3mm



PAMERO



TARHE

PFCfree
no perfluorocarbon



STANDARD
100
SH015 120432
TESTEX



WEIGHT

400g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

25 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

65N/31N




TENSILE STRENGTH-WARP/WEFT

698N/162N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm

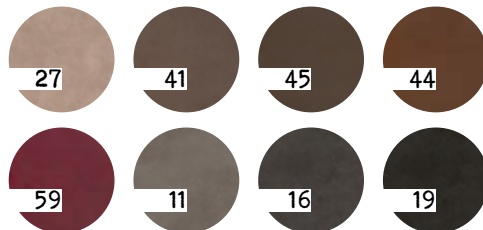



WATUSI

PFCfree
no perfluorocarbon



STANDARD
100
SH015 125432
TESTEX



WEIGHT

330g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

30 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/30N




TENSILE STRENGTH-WARP/WEFT

747N/419N









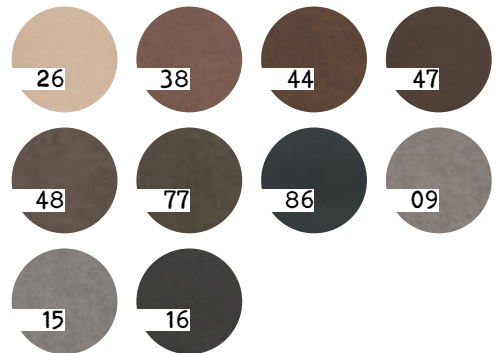





RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT












2mm/2mm



HOGAN
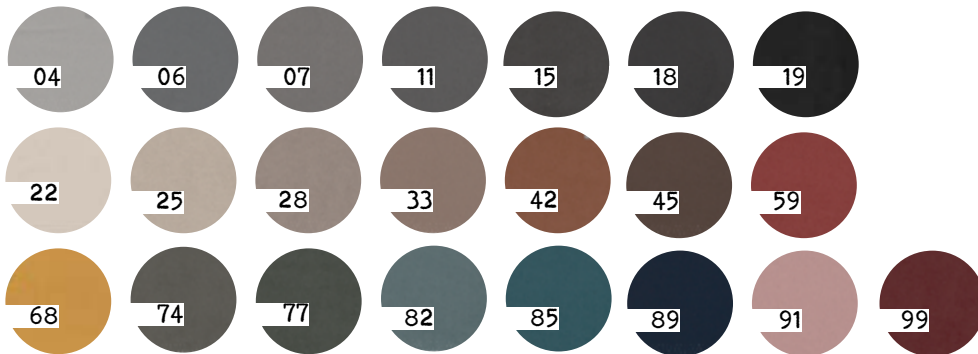
| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 280g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100%PES |
|  | ABRASION RESISTANCE |
| | 25 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 3-4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 30N/30N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 600N/600N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 2,5mm/2,5mm |




-  **WEIGHT**
290g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
30 000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
4
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
50N/30N
-  **TENSILE STRENGTH-WARP/WEFT**
700N/300N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
3,5mm/4,4mm



CHENILLE/VELOUR/ARTIFICIAL FUR

THOR

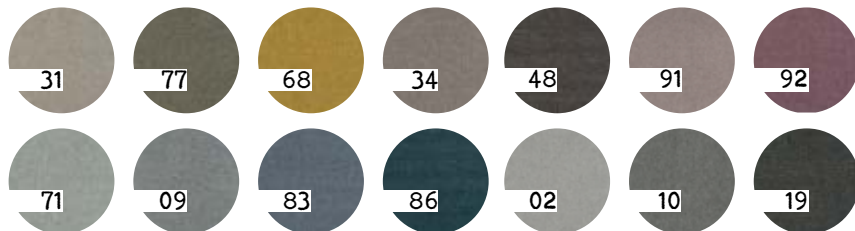

BLUVEL

PFCfree

no perfluorocarbon



STANDARD
100

SH015 129432
TESTEX



WEIGHT

320g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

100 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

3-4



TEAR GROWTH RESISTANCE-WARP/WEFT

39N/32N




TENSILE STRENGTH-WARP/WEFT

698N/384N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm

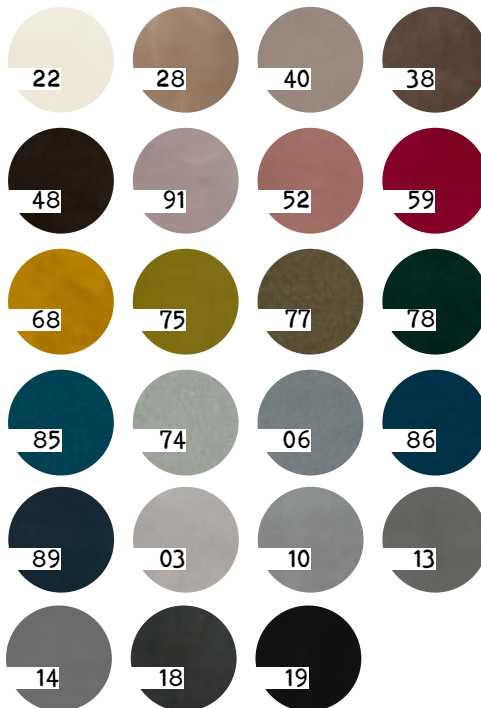












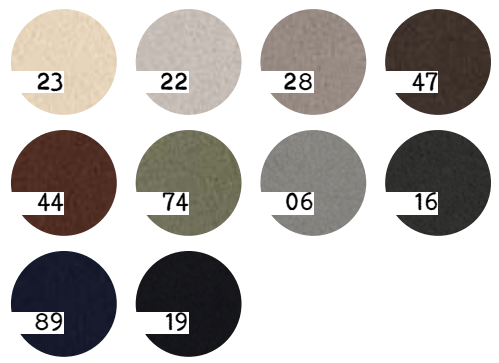


SVEN












PFC free
no perfluorocarbon

OEKO TEX®
STANDARD 100
SH015 129432
TESTEX

-  **WEIGHT**
480g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
50000
-  **PILLING RESISTANCE**
3-4
-  **COLOUR FASTNESS TO LIGHT**
5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
40N/40N
-  **TENSILE STRENGTH-WARP/WEFT**
400N/500N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
2mm/2mm



ODIN

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 370g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100%PES |
|  | ABRASION RESISTANCE |
| | 50 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 100N/50N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 600N/500N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 4mm/3,5mm |





WEIGHT
400g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
96%PES/4%PA



ABRASION RESISTANCE
40 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
5



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4-5




TEAR GROWTH RESISTANCE-WARP/WEFT
60N/40N



TENSILE STRENGTH-WARP/WEFT
1200N/550N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3mm/3mm

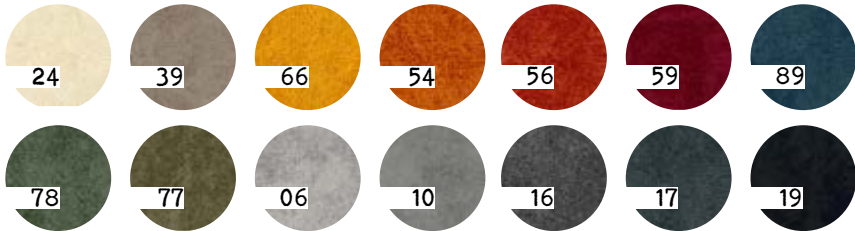

MAVEL

PFCfree

no perfluorocarbon

OEKO
TEX®

STANDARD

100

SH015 129432
TESTEX



WEIGHT

270g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

30N/30N




TENSILE STRENGTH-WARP/WEFT

450N/500N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm

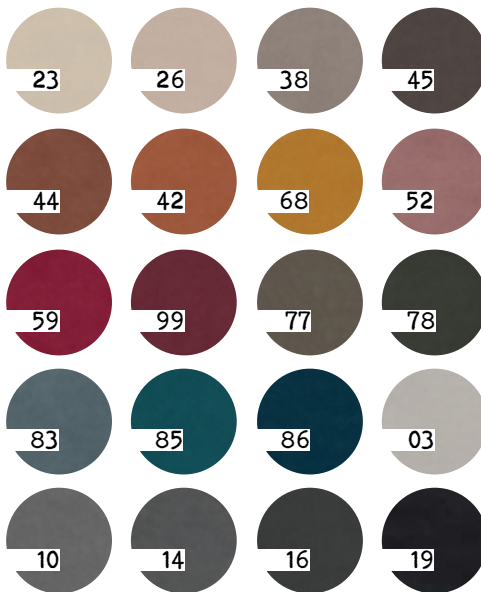














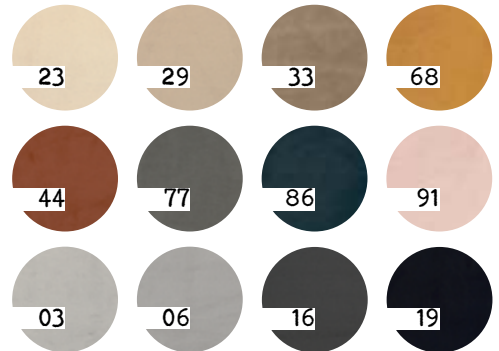
LAPIT

PFC free
no perfluorocarbon














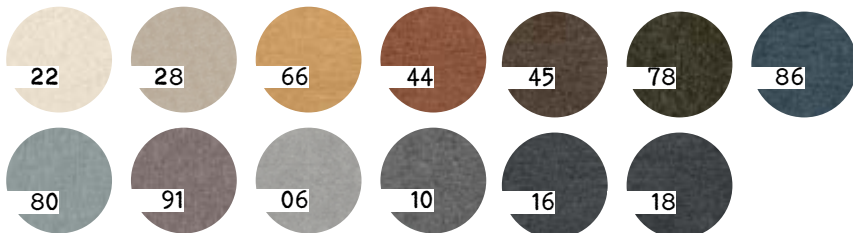
STANDARD
100
SH015 129432
TESTEX

-  **WEIGHT**
315g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
60 000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
4-5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
30N/40N
-  **TENSILE STRENGTH-WARP/WEFT**
400N/450N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
2mm/2mm



RAVEN

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 400g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100%PES |
|  | ABRASION RESISTANCE |
| | 50 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 5 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 40N/40N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 600N/300N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 3,5mm/3,5mm |





WEIGHT

490g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/60N



TENSILE STRENGTH-WARP/WEFT

600N/800N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm



23



30



39



43



59



44



68



52



74



08



78



83



86



06



09



16



19



VITO

PFC free

no perfluorocarbon



STANDARD

100

SH015 129432
TESTEX



WEIGHT

430g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

30N/40N



TENSILE STRENGTH-WARP/WEFT

300N/450N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm
















VOSS

PFC free
no perfluorocarbon














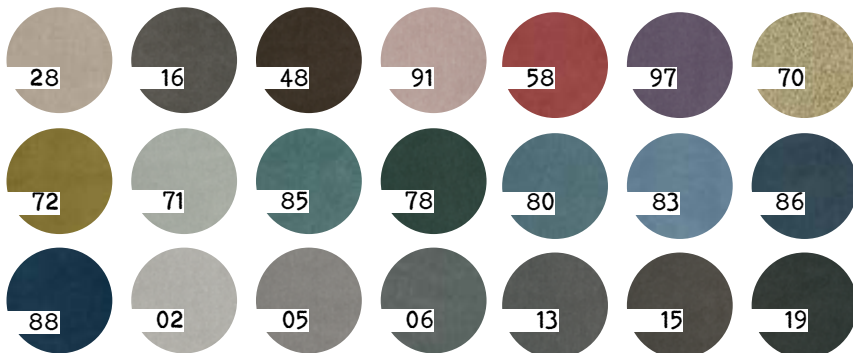
STANDARD
100
SH015 129432
TESTEX

-  **WEIGHT**
370g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
50 000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
3-4
-  **COLOUR FASTNESS TO DRY RUBBING**
4
-  **COLOUR FASTNESS TO WET RUBBING**
3-4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
40N/35N
-  **TENSILE STRENGTH-WARP/WEFT**
600N/400N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
2,5mm/2,5mm



CENTAURI

| | |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|
|  | WEIGHT 300g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL minimum 140 cm |
|  | COMPOSITION 97%PES/3%PA |
|  | ABRASION RESISTANCE 35 000 |
|  | PILLING RESISTANCE 4-5 |
|  | COLOUR FASTNESS TO LIGHT 4 |
|  | COLOUR FASTNESS TO DRY RUBBING 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING 4-5 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT 89N/33N |
|  | TENSILE STRENGTH-WARP/WEFT 759N/352N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 3mm/3mm |





WEIGHT

470g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/50N




TENSILE STRENGTH-WARP/WEFT

800N/550N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm

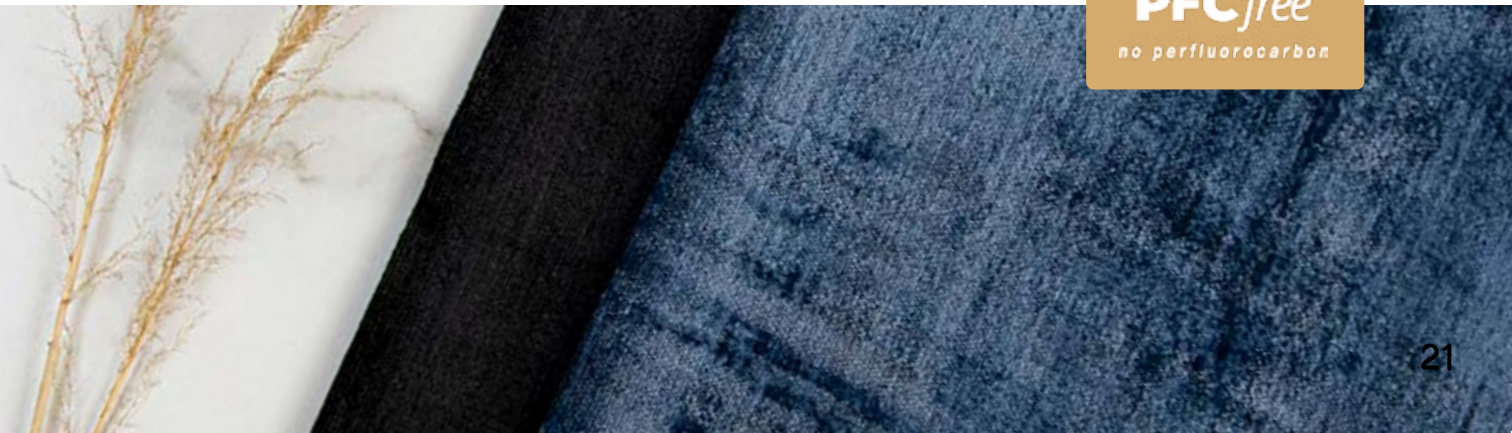

LINO

PFC^{free}

no perfluorocarbon



STANDARD
100

SH018 129432
TESTEX



WEIGHT

235g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

95% Polyester, 5% Polyamide



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/35N




TENSILE STRENGTH-WARP/WEFT


600N/350N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4mm/3,5mm

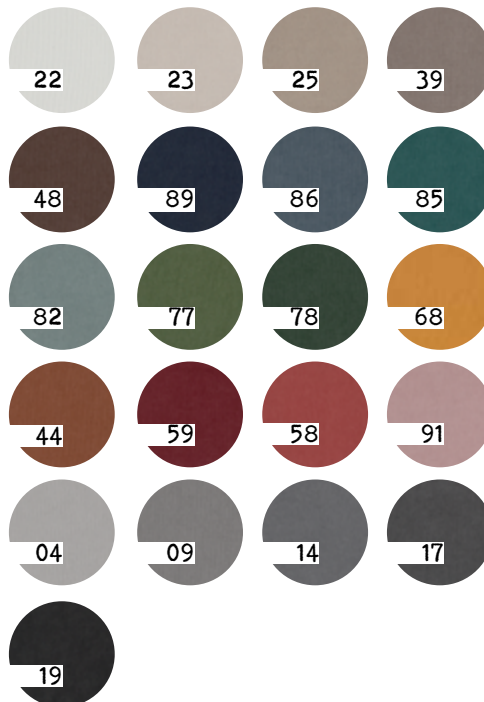

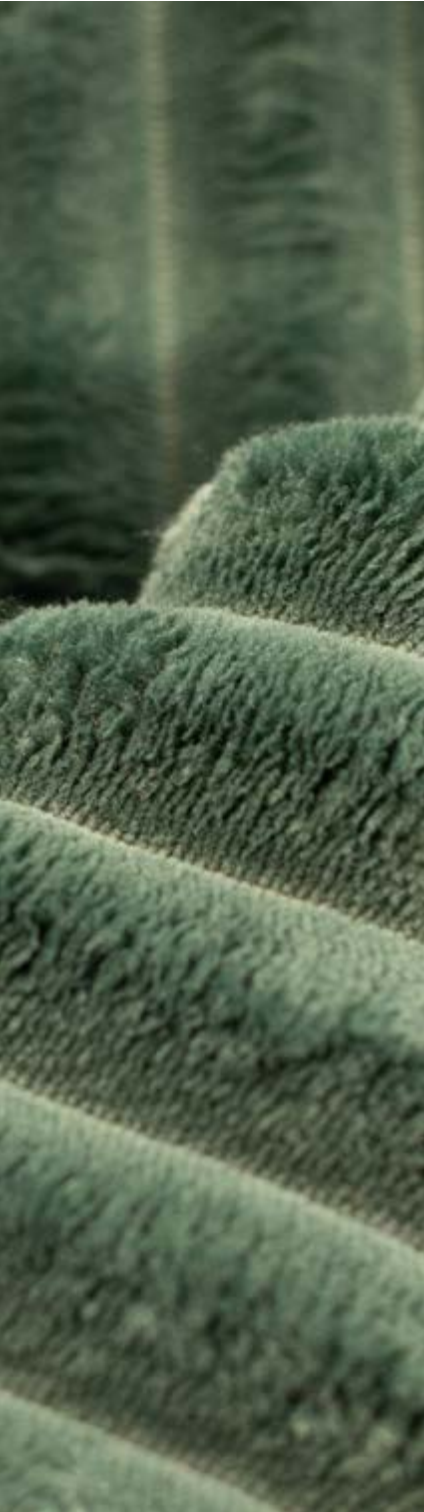










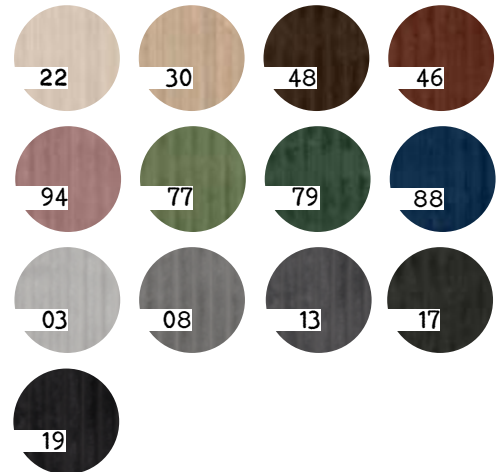


VELO












PFCfree
no perfluorocarbon


OEKO
TEX[®] STANDARD
100
SH015 129432
TESTEX

| | |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------|
|  | WEIGHT 410g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL minimum 140 cm |
|  | COMPOSITION 100% Polyester |
|  | ABRASION RESISTANCE 60 000 |
|  | PILLING RESISTANCE 4 |
|  | COLOUR FASTNESS TO LIGHT 5 |
|  | COLOUR FASTNESS TO DRY RUBBING 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING 4-5 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT 40N/40N |
|  | TENSILE STRENGTH-WARP/WEFT 450N/450N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 2,5mm/2,5mm |



VIVALDI

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 270g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 95%Polyester, 5%Polyamide |
|  | ABRASION RESISTANCE |
| | 50 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 50N/50N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 600N/400N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 3mm/3,5mm |

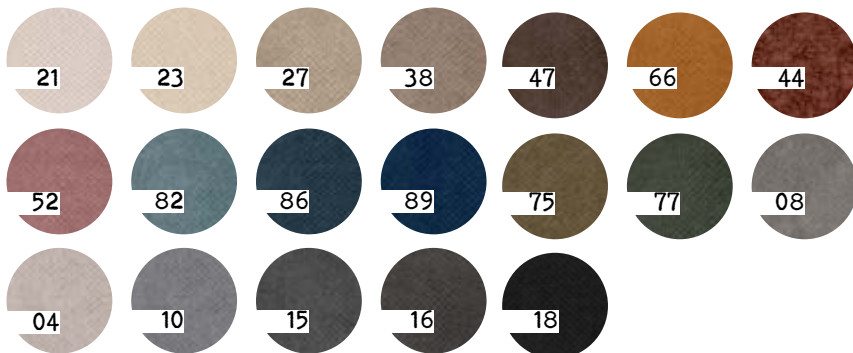

STRUCTURAL

BALDAR

PFC free

no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

390g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

70 000



PILLING RESISTANCE

3-4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/40N




TENSILE STRENGTH-WARP/WEFT

1917N/755N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3,5mm/3,5mm

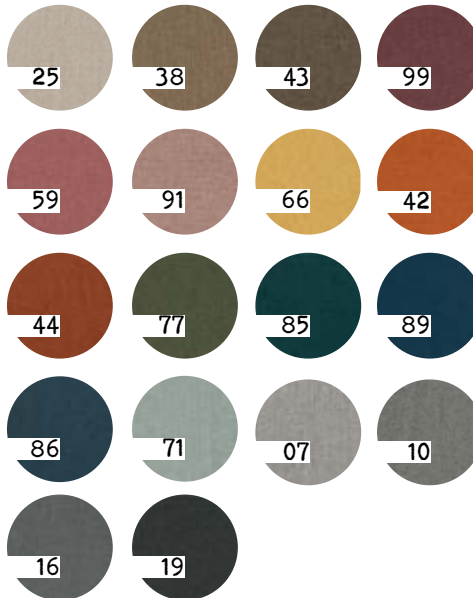

BJORN

PFC free

no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

360g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

80N/80N




TENSILE STRENGTH-WARP/WEFT

700N/700N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2,5mm/2,5mm

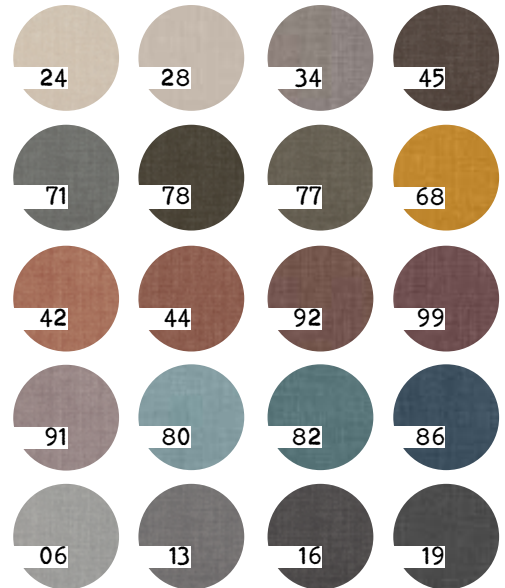

ARNE

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
|  | WORKING WIDTH OF ROLL |
|  | COMPOSITION |
|  | ABRASION RESISTANCE |
|  | PILLING RESISTANCE |
|  | COLOUR FASTNESS TO LIGHT |
|  | COLOUR FASTNESS TO DRY RUBBING |
|  | COLOUR FASTNESS TO WET RUBBING |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
|  | TENSILE STRENGTH-WARP/WEFT |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |

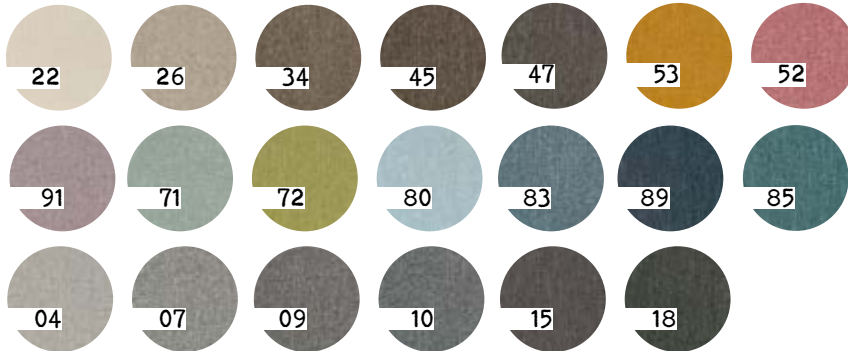



WEIGHT
380g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
100% PES



ABRASION RESISTANCE
30 000



PILLING RESISTANCE
4-5



COLOUR FASTNESS TO LIGHT
4



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4



TEAR GROWTH RESISTANCE-WARP/WEFT
60N/40N




TENSILE STRENGTH-WARP/WEFT
1500N/700N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3mm/3mm



BREGO

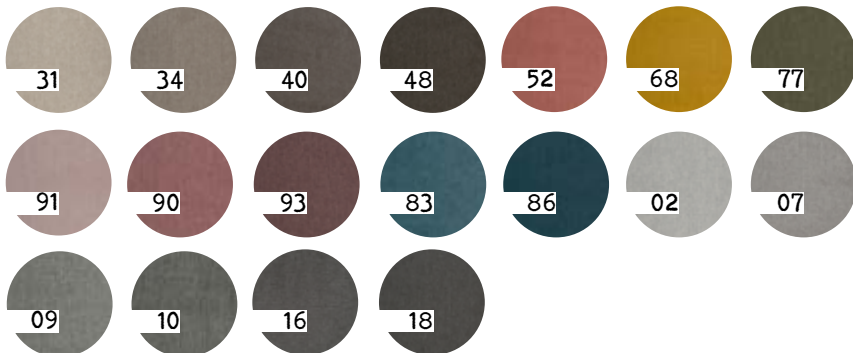

STANDARD
100
SH015 129432
TESTEX

PFC free
no perfluorocarbon



FJORD

PFC free

no perfluorocarbon



STANDARD
100
SHO IS 129432
TESTEX



WEIGHT

280g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

92%PES/8%PA



ABRASION RESISTANCE

100 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

30N/30N




TENSILE STRENGTH-WARP/WEFT


600N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4mm/4mm

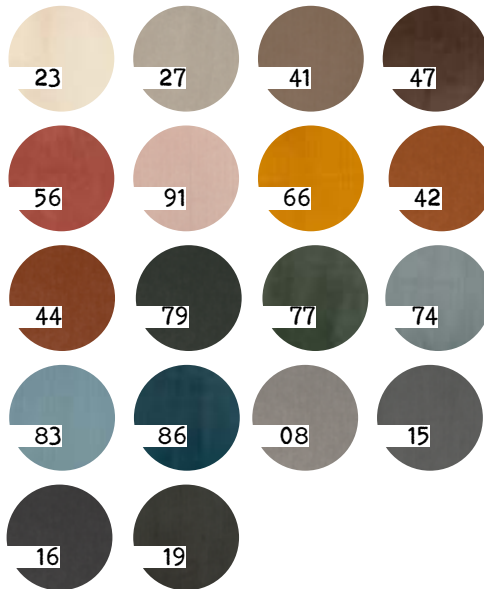

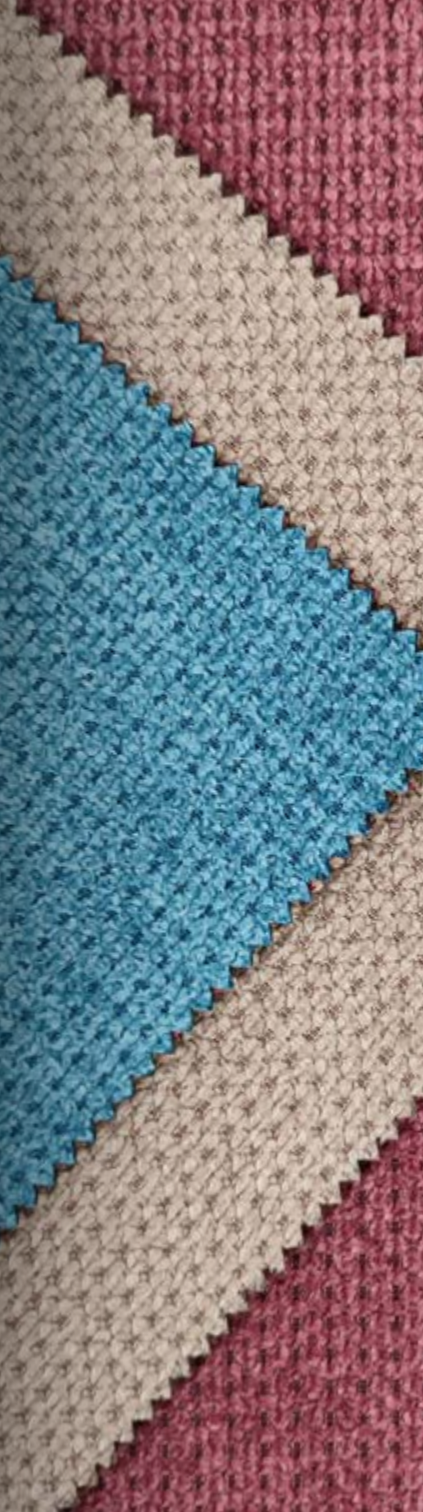

VARDO

PFC free
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT
370g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
92%PES/8%PA



ABRASION RESISTANCE
50 000



PILLING RESISTANCE
4-5



COLOUR FASTNESS TO LIGHT
4



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4



TEAR GROWTH RESISTANCE-WARP/WEFT
50N/55N















TENSILE STRENGTH-WARP/WEFT
839N/599N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3mm/3mm



HEVRE

| | |
|-------------------------------------------------------------------------------------|----------------------------------------------------|
|  | WEIGHT |
|  | 480g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL minimum 140 cm |
|  | COMPOSITION 100%PES |
|  | ABRASION RESISTANCE 60 000 |
|  | PILLING RESISTANCE 4 |
|  | COLOUR FASTNESS TO LIGHT 5 |
|  | COLOUR FASTNESS TO DRY RUBBING 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING 4-5 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT 100N/100N |
|  | TENSILE STRENGTH-WARP/WEFT 600N/600N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 3mm/3,5mm |

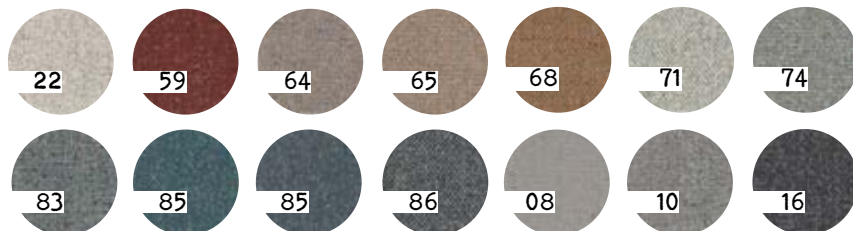



WEIGHT
480g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
90%PES+10%PAN



ABRASION RESISTANCE
50 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
5



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4-5



TEAR GROWTH RESISTANCE-WARP/WEFT
100N/80N



TENSILE STRENGTH-WARP/WEFT
700N/600N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3,5mm/2,5mm



NOLIO



24



32



35



36



91




66



68



57



76



77



84




85




89




07



08



12



13



STANDARD
100
SH015 129432
TESTEX

PFC^{free}

no perfluorocarbon



RAGO

PFC free
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

275g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

92%PES+8%PA



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/50N




TENSILE STRENGTH-WARP/WEFT

700N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3,5mm/3,5mm

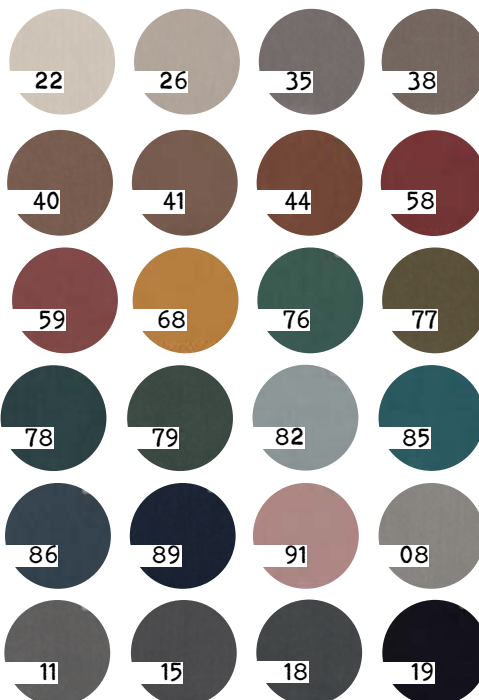



HYPHER

PFC free
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT
340g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
92%PES+8%PA



ABRASION RESISTANCE
50 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
5



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4-5




TEAR GROWTH RESISTANCE-WARP/WEFT
60N/60N



TENSILE STRENGTH-WARP/WEFT
700N/600N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
4mm/4mm

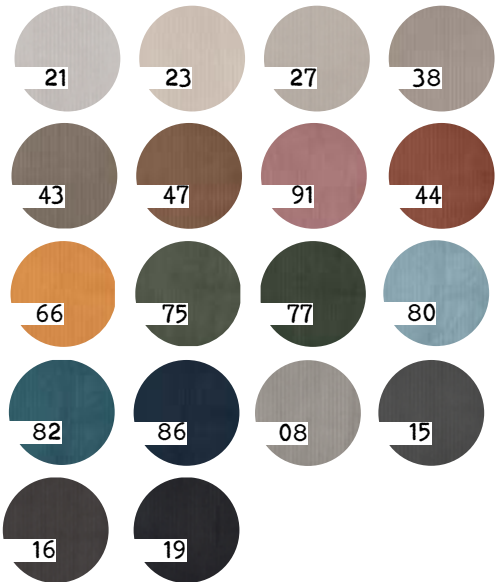

TED

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 400g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100% Polyester |
|  | ABRASION RESISTANCE |
| | 60 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 5 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 60N/60N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 600N/600N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 3mm/4mm |

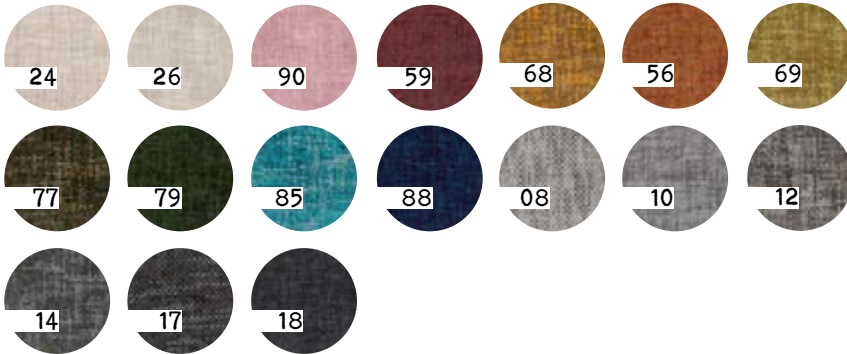



WEIGHT

290g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100% Polyester



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/50N



TENSILE STRENGTH-WARP/WEFT

600N/600N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2,5mm/2,5mm



LUMOS

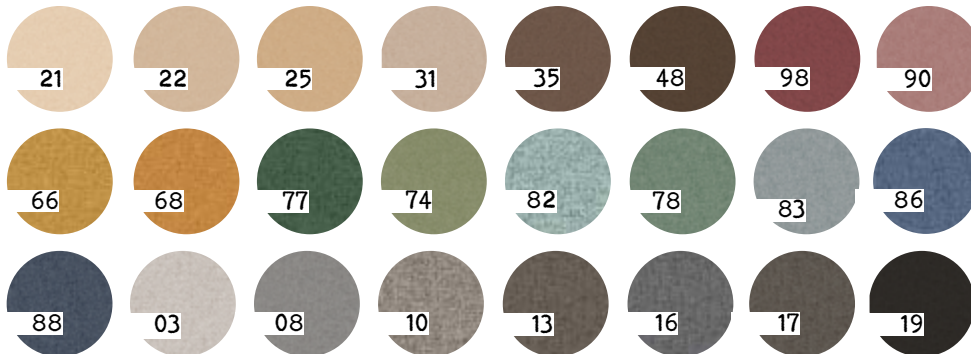

LORD

PFC free

no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

360g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

95%PES/5%PA



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/50N




TENSILE STRENGTH-WARP/WEFT

700N/450N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm

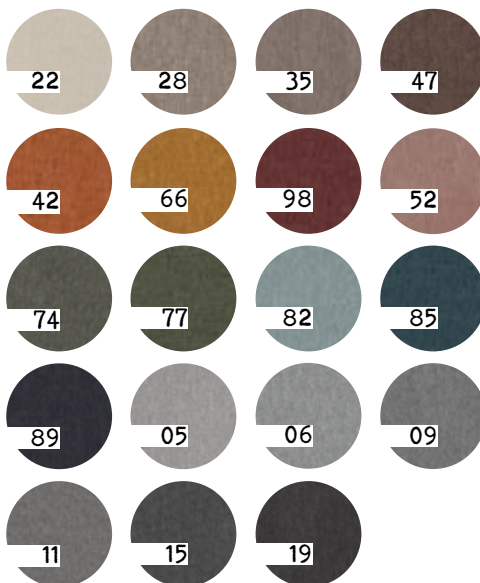












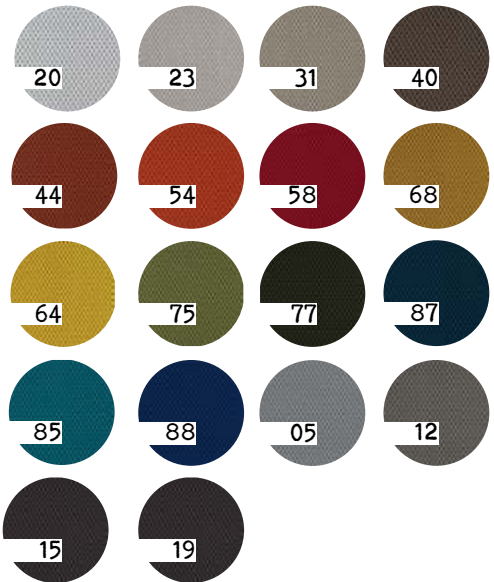


SONIC

PFC free
no perfluorocarbon

**OEKO
TEX®** STANDARD
100
SH015 129432
TESTEX

-  **WEIGHT**
550g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
60 000
-  **PILLING RESISTANCE**
4-5
-  **COLOUR FASTNESS TO LIGHT**
4-5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4-5
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
60N/60N
-  **TENSILE STRENGTH-WARP/WEFT**
480N/600N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
3mm/3mm



HYDRA

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
|  | WORKING WIDTH OF ROLL |
|  | COMPOSITION |
|  | ABRASION RESISTANCE |
|  | PILLING RESISTANCE |
|  | COLOUR FASTNESS TO LIGHT |
|  | COLOUR FASTNESS TO DRY RUBBING |
|  | COLOUR FASTNESS TO WET RUBBING |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
|  | TENSILE STRENGTH-WARP/WEFT |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |

320g/m² ± 5%

minimum 140 cm

100% Polyester

60 000

4

4-5


4-5

4

50N/50N

400N/400N



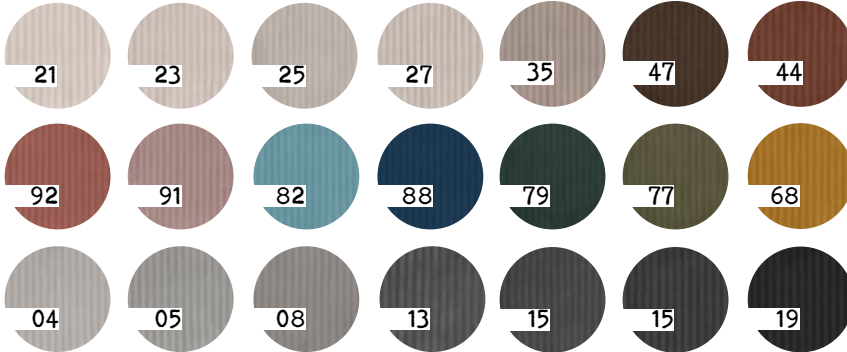








4mm/4mm




FLAT WEAVES

NORN



| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 330g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100%PES |
|  | ABRASION RESISTANCE |
| | 50 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4-5 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 90N/90N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 1100N/700N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 3mm/3mm |

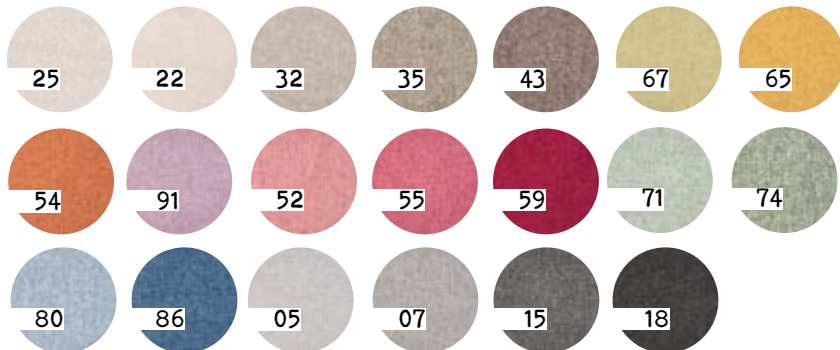



WEIGHT

230g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

35 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

87N/89N



TENSILE STRENGTH-WARP/WEFT

1050N/947N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4-5mm/4-5mm



24



27



28



35



38



47



45



48



77



68



91



59



74



87



88



05



09



12



15



11



18



STANDARD
100
SH015 129432
TESTEX

PFC free
no perfluorocarbon

GANDAR

fabb

PFC free
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX

WATER free
productions



WEIGHT
245g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
100% PES



ABRASION RESISTANCE
50 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
4-5



COLOUR FASTNESS TO DRY RUBBING
4



COLOUR FASTNESS TO WET RUBBING
4




TEAR GROWTH RESISTANCE-WARP/WEFT
40N/40N



TENSILE STRENGTH-WARP/WEFT
400N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
4mm/4,5mm

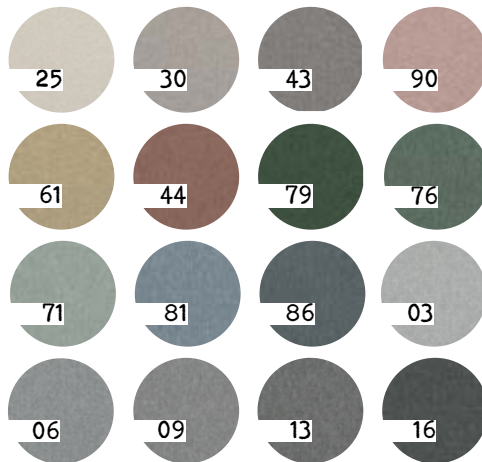












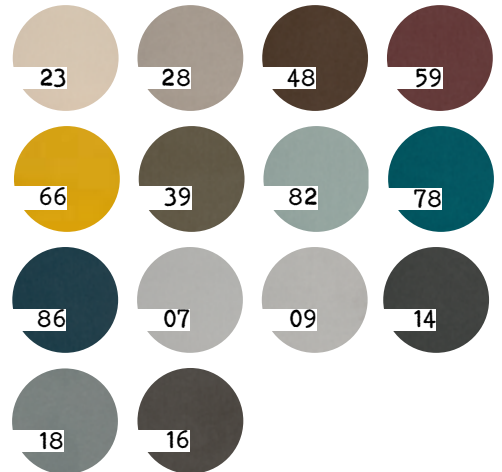
DILJA

PFC free
no perfluorocarbon














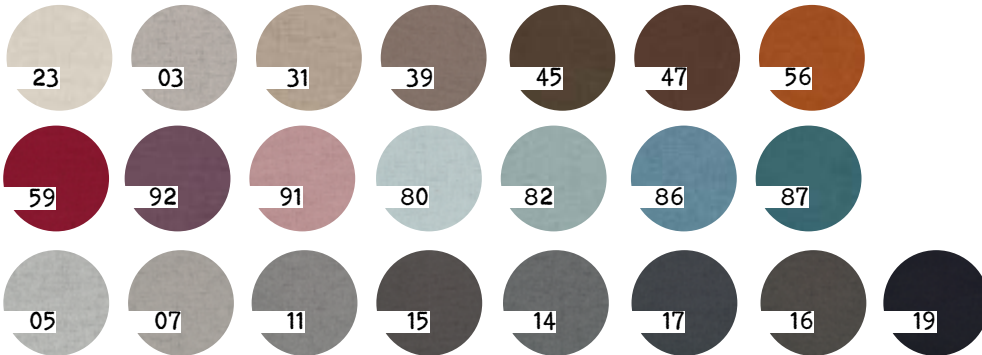
STANDARD
100
SH015 129432
TESTEX

| | |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|
|  | WEIGHT 300g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL minimum 140 cm |
|  | COMPOSITION 85%PES/15%PA |
|  | ABRASION RESISTANCE 35 000 |
|  | PILLING RESISTANCE 3-4 |
|  | COLOUR FASTNESS TO LIGHT 4 |
|  | COLOUR FASTNESS TO DRY RUBBING 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT 58N/47N |
|  | TENSILE STRENGTH-WARP/WEFT 1016N/387N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 3mm/3mm |



YUCA



| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 300g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100% PES |
|  | ABRASION RESISTANCE |
| | 50 000 |
|  | PILLING RESISTANCE |
| | 4-5 |
|  | COLOUR FASTNESS TO LIGHT |
| | 4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4-5 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 50N/35N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 696N/544N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 4mm/4mm |



-  **WEIGHT**
245g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
50 000
-  **PILLING RESISTANCE**
4-5
-  **COLOUR FASTNESS TO LIGHT**
4
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4-5
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
74N/78N
-  **TENSILE STRENGTH-WARP/WEFT**
1153N/1250N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
4mm/4mm



SAVIO

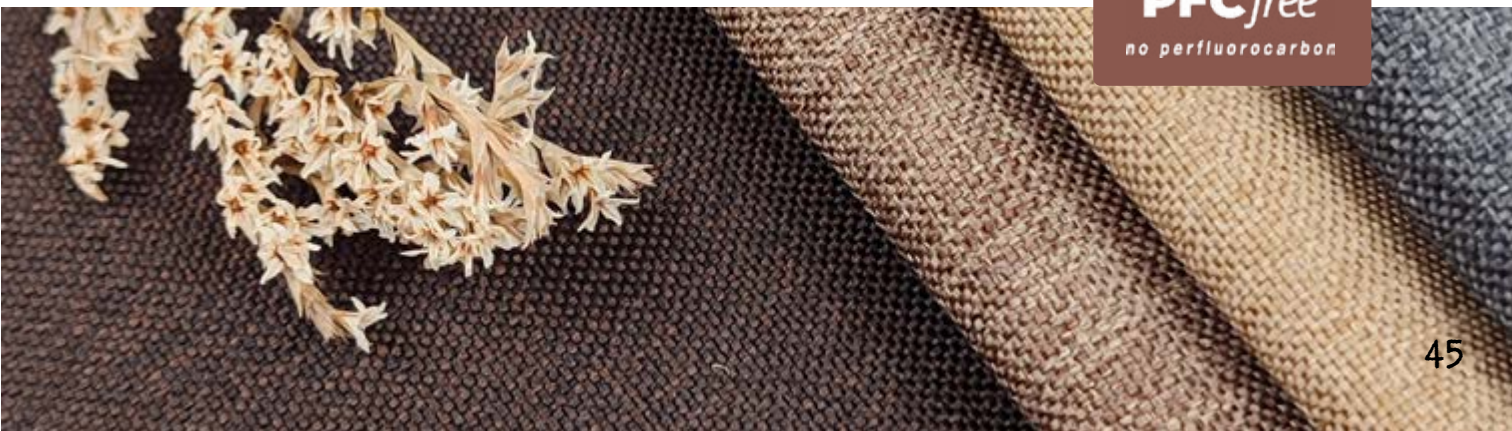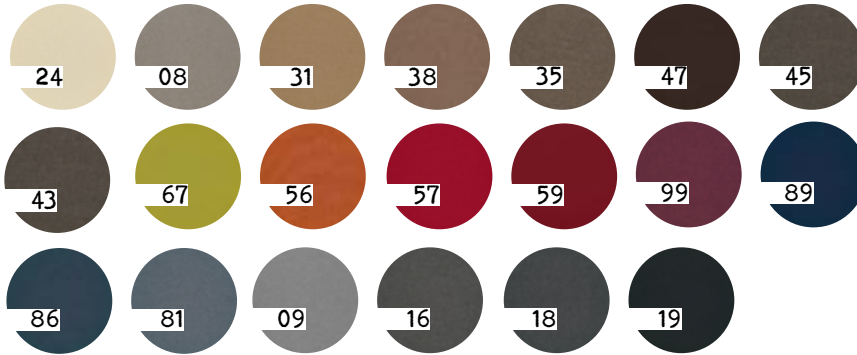

OTIS

PFC free

no perfluorocarbon

**OEKO
TEX®**

STANDARD
100
SH015 129432
TESTEX

WATER free

productions



WEIGHT

215g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

100 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/30N




TENSILE STRENGTH-WARP/WEFT

600N/350N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3,5mm/3,5mm

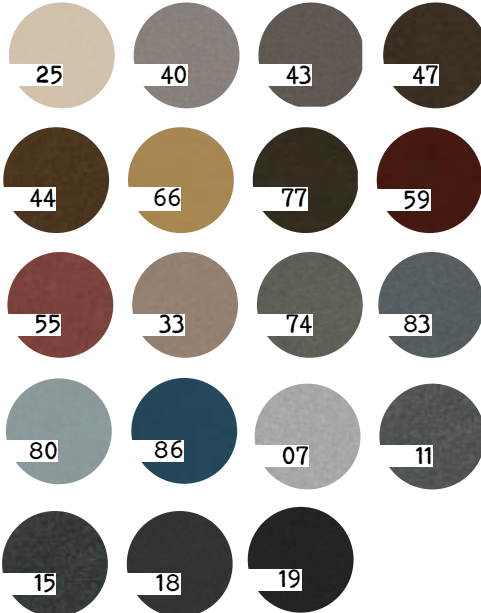












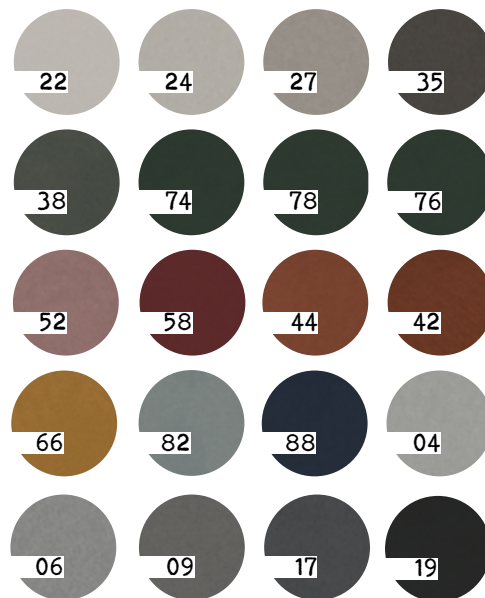
COLET

PFC free
no perfluorocarbon














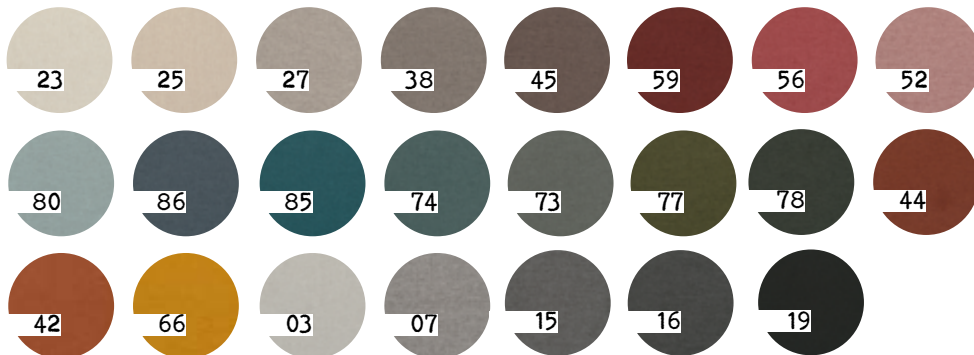
STANDARD
100
SH015 129432
TESTEX

| | |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|
|  | WEIGHT 260g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL minimum 140 cm |
|  | COMPOSITION 100%PES |
|  | ABRASION RESISTANCE 40 000 |
|  | PILLING RESISTANCE 4 |
|  | COLOUR FASTNESS TO LIGHT 4 |
|  | COLOUR FASTNESS TO DRY RUBBING 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING 4-5 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT 40N/40N |
|  | TENSILE STRENGTH-WARP/WEFT 760N/600N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 4mm/4mm |



NEA

| | |
|-------------------------------------------------------------------------------------|---------------------------------------|
|  | WEIGHT |
| | 350g/m ² ± 5% |
|  | WORKING WIDTH OF ROLL |
| | minimum 140 cm |
|  | COMPOSITION |
| | 100%PES |
|  | ABRASION RESISTANCE |
| | 60 000 |
|  | PILLING RESISTANCE |
| | 4 |
|  | COLOUR FASTNESS TO LIGHT |
| | 4 |
|  | COLOUR FASTNESS TO DRY RUBBING |
| | 4-5 |
|  | COLOUR FASTNESS TO WET RUBBING |
| | 4 |
|  | TEAR GROWTH RESISTANCE-WARP/WEFT |
| | 60N/45N |
|  | TENSILE STRENGTH-WARP/WEFT |
| | 1000N/500N |
|  | RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT |
| | 3mm/3mm |



OEKO
TEX®

STANDARD
100
SH015 129432
TESTEX

PFC free
no perfluorocarbon

fabb®

fabb.pl

