

fabb[®]
catalog

COLLECTION

LEATHER-LIKE

AZAR	2
CORTES	3
YUMA	4
PAMERO	5
TARHE	6
WATUSI	7
HOGAN	8

CHENILLE/VELOUR/ARTIFICIAL FUR

THOR	9
BLUVEL	10
SVEN	11
ODIN	12
HAVANA	13
MAVEL	14
LAPIT	15
RAVEN	16
HAGA	17
VITO	18
VOSS	19
CENTAURI	20
LOTTA	21
LINO	22
VELO	23
VIVALDI	24
BORG	25
BUBBLE	26
LEO	27
LARRY	28

STRUCTURAL

BALDAR	29
BJORN	30
ARNE	31
BREGO	32
FJORD	33
VARDO	34
HEVRE	35
NOLIO	36
RAGO	37
HYPHER	38
TED	39
LUMOS	40
LORD	41
SONIC	42
HYDRA	43
PIXIE	44

FLAT WEAVES

NORN	45
COMO	46
GANDAR	47
DILJA	48
YUCA	49
SAVIO	50
OTIS	51
COLET	52
NEA	53
LINS	54

LEATHER-LIKE

AZAR

PFCfree
no perfluorocarbon

OEKO
TEX®

STANDARD
100
SH015 129432
TESTEX



WEIGHT

240g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

70N/80N



TENSILE STRENGTH-WARP/WEFT

780N/510N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4mm/4mm











CORTES












PFC free
no perfluorocarbon

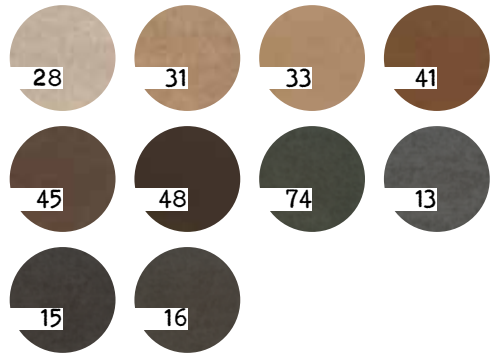
OEKO TEX®
STANDARD 100
SH015 129432
TESTEX

-  **WEIGHT**
330g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
35 000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
3-4
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
71N/25N
-  **TENSILE STRENGTH-WARP/WEFT**
830N/275N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
3mm/3mm



YUMA

	WEIGHT
	310g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100%PES
	ABRASION RESISTANCE
	40 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	3-4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	50N/28N
	TENSILE STRENGTH-WARP/WEFT
	950N/370N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/3mm

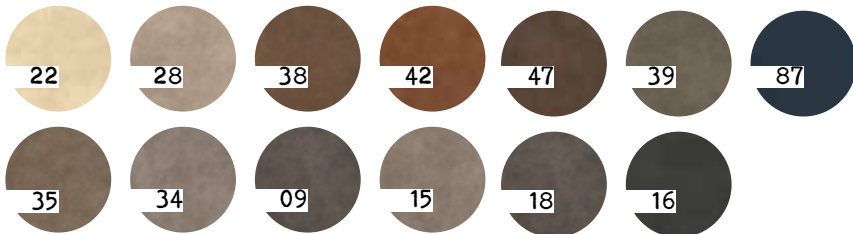



WEIGHT

190g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

45N/45N



TENSILE STRENGTH-WARP/WEFT

400N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm



PAMERO



38



34



45



43



44



48



16



STANDARD
100
SH015-129432
TESTEX

PFCfree

no perfluorocarbon



TARHE

PFCfree
no perfluorocarbon



STANDARD
100
SH015 120432
TESTEX



WEIGHT

400g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

25 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

65N/31N




TENSILE STRENGTH-WARP/WEFT


698N/162N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm

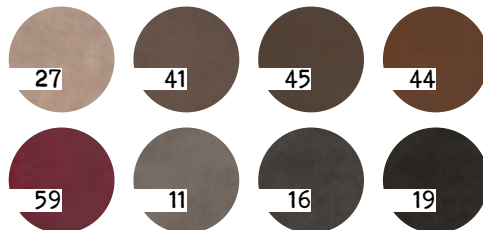

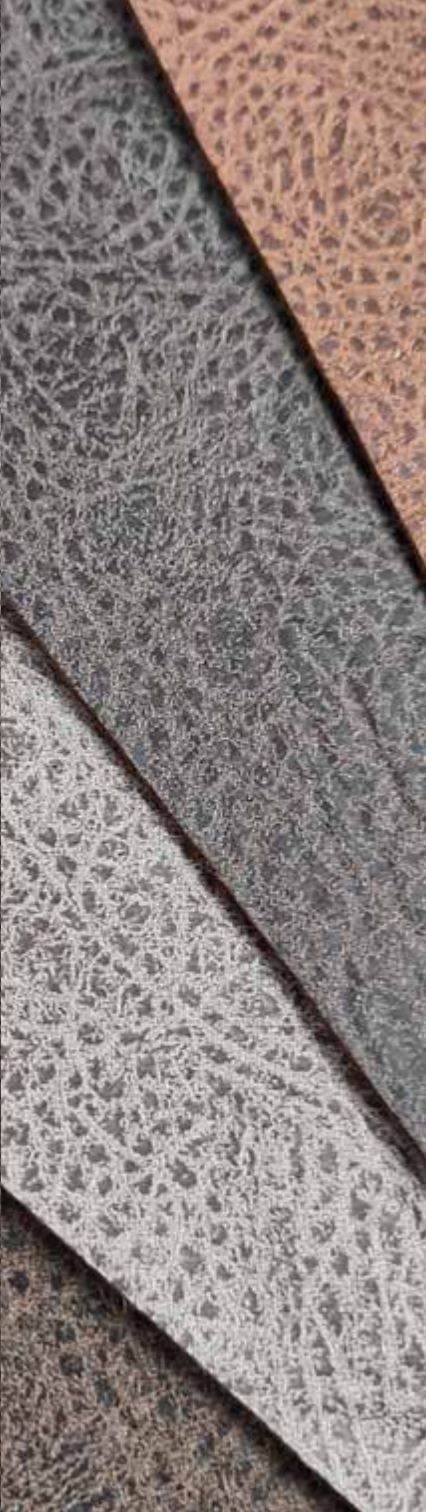

WATUSI

PFCfree
no perfluorocarbon



STANDARD
100
SH015 125432
TESTEX



WEIGHT

330g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

30 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/30N




TENSILE STRENGTH-WARP/WEFT

747N/419N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT





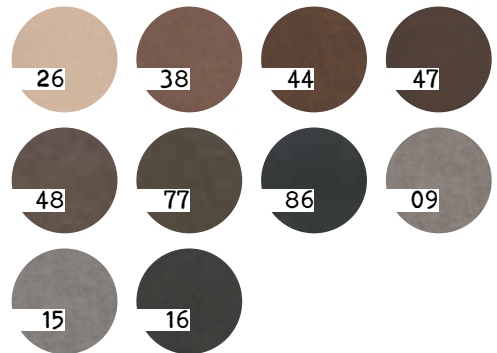



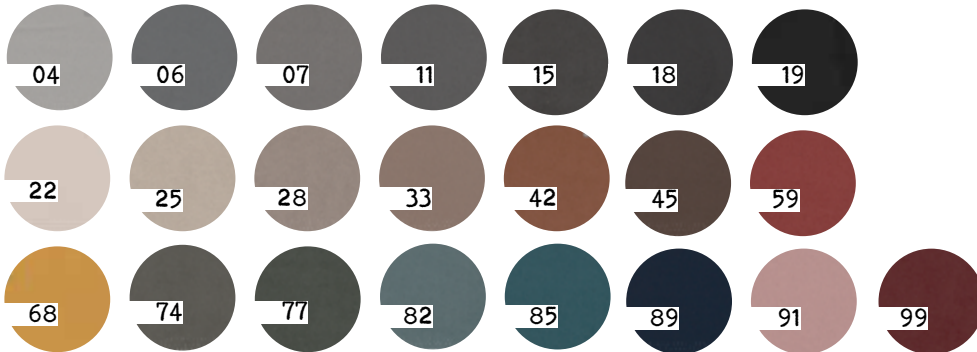


2mm/2mm



HOGAN

	WEIGHT
	280g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100%PES
	ABRASION RESISTANCE
	25 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	3-4
	COLOUR FASTNESS TO DRY RUBBING
	4
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	30N/30N
	TENSILE STRENGTH-WARP/WEFT
	600N/600N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	2,5mm/2,5mm




-  WEIGHT
290g/m² ± 5%
-  WORKING WIDTH OF ROLL
minimum 140 cm
-  COMPOSITION
100% PES
-  ABRASION RESISTANCE
30 000
-  PILLING RESISTANCE
4
-  COLOUR FASTNESS TO LIGHT
4
-  COLOUR FASTNESS TO DRY RUBBING
4-5
-  COLOUR FASTNESS TO WET RUBBING
4
-  TEAR GROWTH RESISTANCE-WARP/WEFT
50N/30N
-  TENSILE STRENGTH-WARP/WEFT
700N/300N
-  RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3,5mm/4,4mm



CHENILLE/VELOUR/ARTIFICIAL FUR

THOR

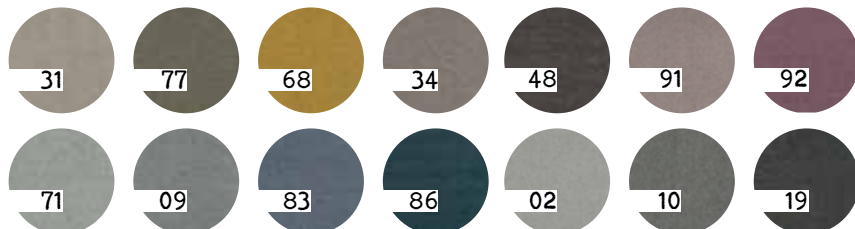

BLUVEL

PFC free

no perfluorocarbon



STANDARD
100

SH015 129432
TESTEX



WEIGHT

320g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

100 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

3-4



TEAR GROWTH RESISTANCE-WARP/WEFT

39N/32N




TENSILE STRENGTH-WARP/WEFT

698N/384N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm

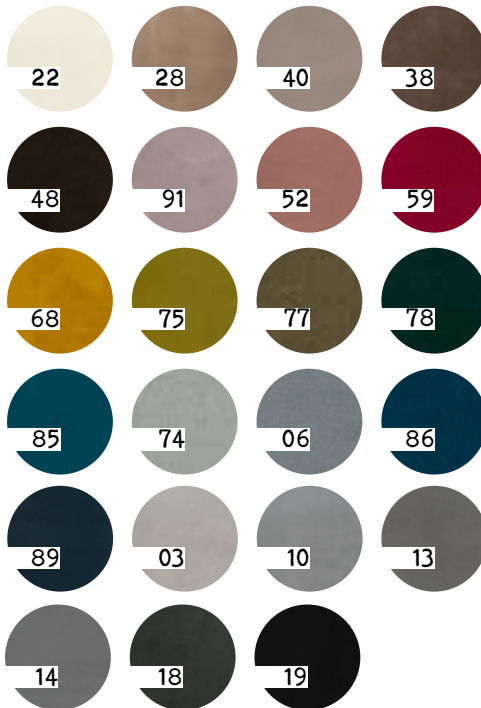



SVEN

PFC free
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT
480g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
100%PES



ABRASION RESISTANCE
50000



PILLING RESISTANCE
3-4



COLOUR FASTNESS TO LIGHT
5



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4




TEAR GROWTH RESISTANCE-WARP/WEFT
40N/40N














TENSILE STRENGTH-WARP/WEFT
400N/500N

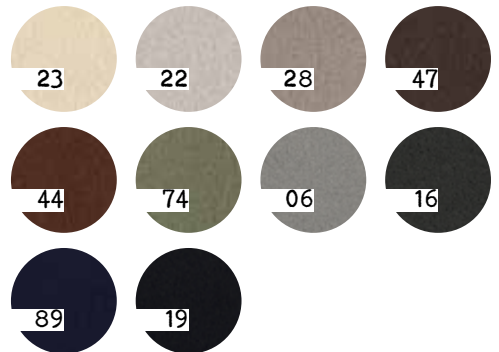


RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
2mm/2mm



ODIN

-  WEIGHT
370g/m2 ± 5%
-  WORKING WIDTH OF ROLL
minimum 140 cm
-  COMPOSITION
100%PES
-  ABRASION RESISTANCE
50 000
-  PILLING RESISTANCE
4
-  COLOUR FASTNESS TO LIGHT
4
-  COLOUR FASTNESS TO DRY RUBBING
4
-  COLOUR FASTNESS TO WET RUBBING
4
-  TEAR GROWTH RESISTANCE-WARP/WEFT
100N/50N
-  TENSILE STRENGTH-WARP/WEFT
600N/500N
-  RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
4mm/3,5mm

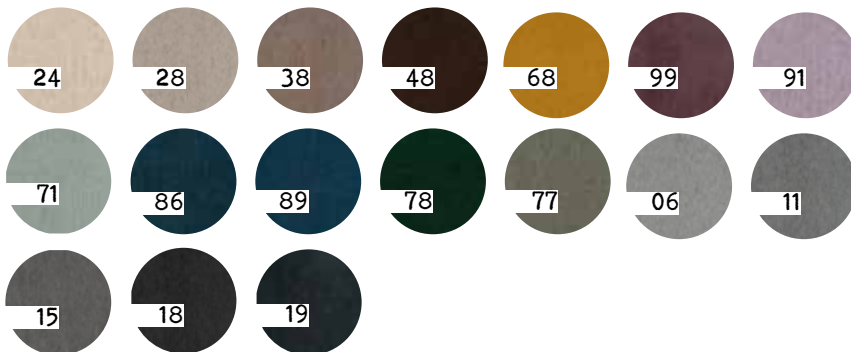



WEIGHT
400g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
96%PES/4%PA



ABRASION RESISTANCE
40 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
5



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4-5




TEAR GROWTH RESISTANCE-WARP/WEFT
60N/40N



TENSILE STRENGTH-WARP/WEFT
1200N/550N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3mm/3mm



MAVEL

PFC free

no perfluorocarbon



STANDARD

100

SH015 129432
TESTEX



WEIGHT

270g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

30N/30N




TENSILE STRENGTH-WARP/WEFT

450N/500N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm

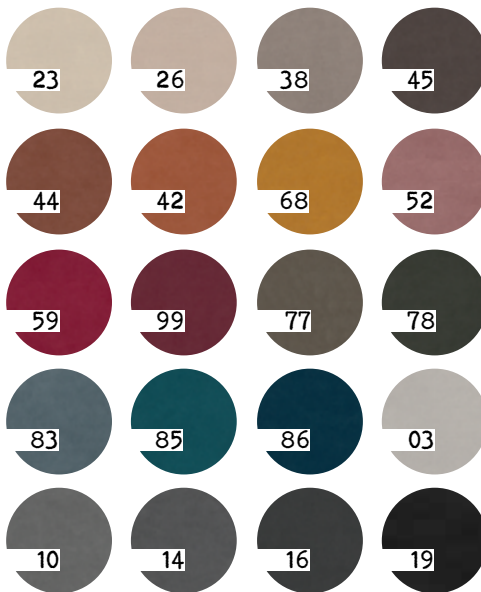














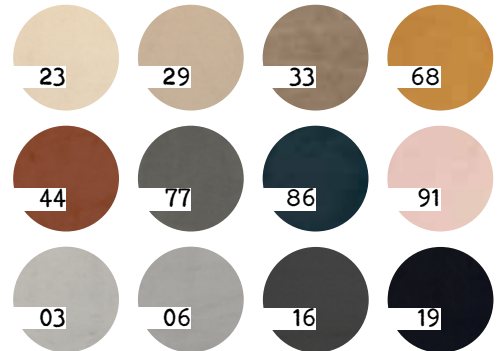
LAPIT

PFC free
no perfluorocarbon















STANDARD
100
SH015 129432
TESTEX

-  **WEIGHT**
315g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
60 000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
4-5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
30N/40N
-  **TENSILE STRENGTH-WARP/WEFT**
400N/450N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
2mm/2mm



RAVEN

	WEIGHT
	400g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100%PES
	ABRASION RESISTANCE
	50 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	5
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	40N/40N
	TENSILE STRENGTH-WARP/WEFT
	600N/300N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3,5mm/3,5mm

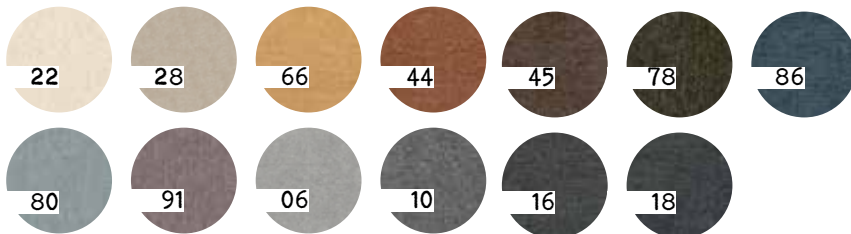



WEIGHT

490g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/60N




TENSILE STRENGTH-WARP/WEFT

600N/800N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm

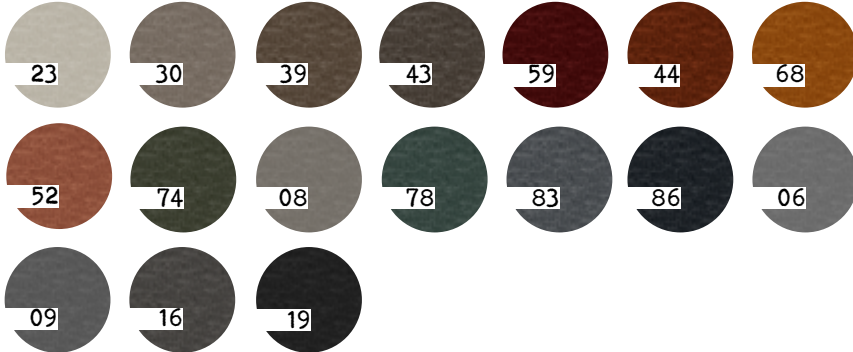

VITO

PFC free

no perfluorocarbon



STANDARD

100

SH015 129432
TESTEX



WEIGHT

430g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100% PES



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

30N/40N



TENSILE STRENGTH-WARP/WEFT

300N/450N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2mm/2mm





PFCfree

no perfluorocarbon



STANDARD
100

SH015 129432
TESTEX



WEIGHT

370g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

3-4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

3-4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/35N



TENSILE STRENGTH-WARP/WEFT

600N/400N














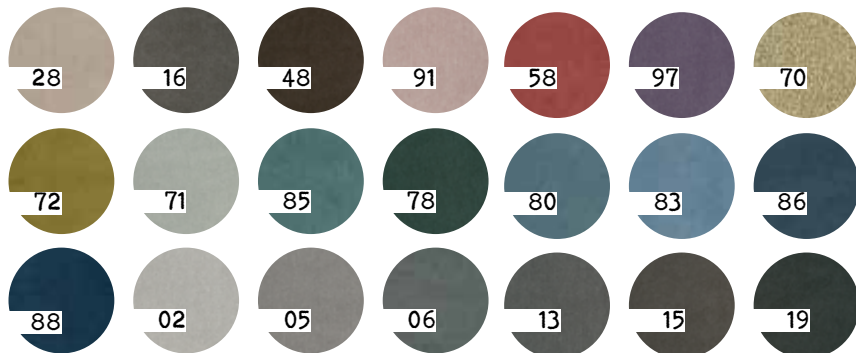
RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2,5mm/2,5mm



CENTAURI

	WEIGHT
	300g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	97%PES/3%PA
	ABRASION RESISTANCE
	35 000
	PILLING RESISTANCE
	4-5
	COLOUR FASTNESS TO LIGHT
	4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT
	89N/33N
	TENSILE STRENGTH-WARP/WEFT
	759N/352N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/3mm





WEIGHT

470g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/50N



TENSILE STRENGTH-WARP/WEFT

800N/550N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm



LINO

PFC free
no perfluorocarbon



STANDARD
100
SH018 129432
TESTEX



WEIGHT

235g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

95% Polyester, 5% Polyamide



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/35N




TENSILE STRENGTH-WARP/WEFT

600N/350N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4mm/3,5mm

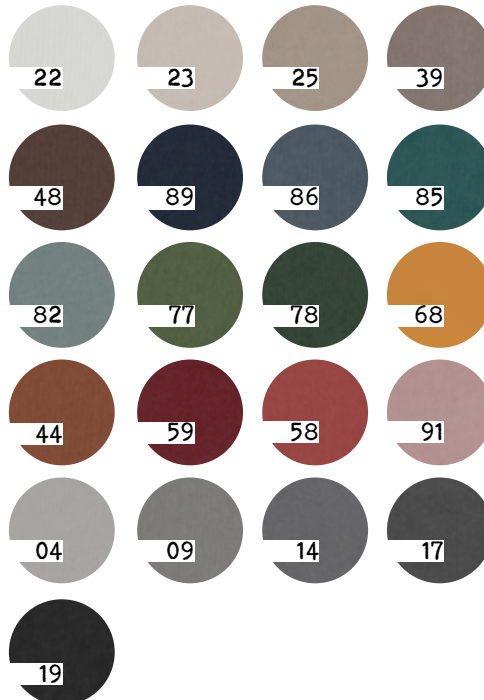












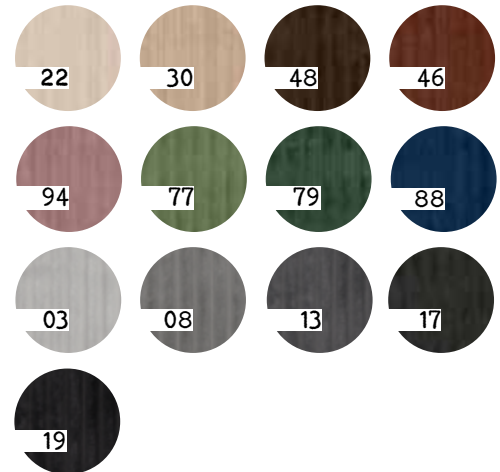


VELO

PFCfree
no perfluorocarbon


OEKO
TEX[®] STANDARD
100
SH015 129432
TESTEX

	WEIGHT 410g/m ² ± 5%
	WORKING WIDTH OF ROLL minimum 140 cm
	COMPOSITION 100% Polyester
	ABRASION RESISTANCE 60 000
	PILLING RESISTANCE 4
	COLOUR FASTNESS TO LIGHT 5
	COLOUR FASTNESS TO DRY RUBBING 4-5
	COLOUR FASTNESS TO WET RUBBING 4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT 40N/40N
	TENSILE STRENGTH-WARP/WEFT 450N/450N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 2,5mm/2,5mm



VIVALDI

	WEIGHT
	270g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	95%Polyester, 5%Polyamide
	ABRASION RESISTANCE
	50 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	50N/50N
	TENSILE STRENGTH-WARP/WEFT
	600N/400N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/3,5mm

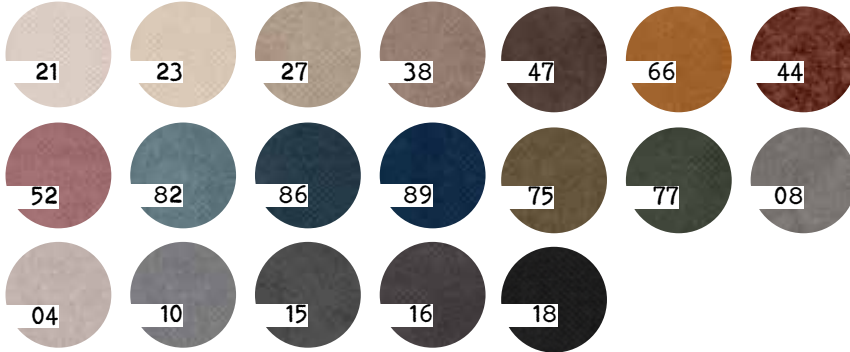



WEIGHT

$g/m^2 \pm 5\%$



WORKING WIDTH OF ROLL



COMPOSITION



ABRASION RESISTANCE



PILLING RESISTANCE



COLOUR FASTNESS TO LIGHT



COLOUR FASTNESS TO DRY RUBBING



COLOUR FASTNESS TO WET RUBBING




TEAR GROWTH RESISTANCE-WARP/WEFT



TENSILE STRENGTH-WARP/WEFT



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

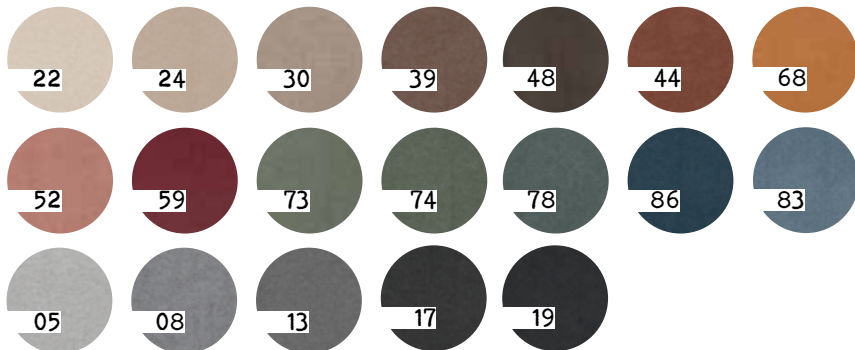

BUBBLE

PFC free

no perfluorocarbon



STANDARD
100

SH015 120432
TESTEX



WEIGHT

g/m² ± 5%



WORKING WIDTH OF ROLL

minimum cm



COMPOSITION



ABRASION RESISTANCE



PILLING RESISTANCE



COLOUR FASTNESS TO LIGHT



COLOUR FASTNESS TO DRY RUBBING



COLOUR FASTNESS TO WET RUBBING




TEAR GROWTH RESISTANCE-WARP/WEFT



TENSILE STRENGTH-WARP/WEFT



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

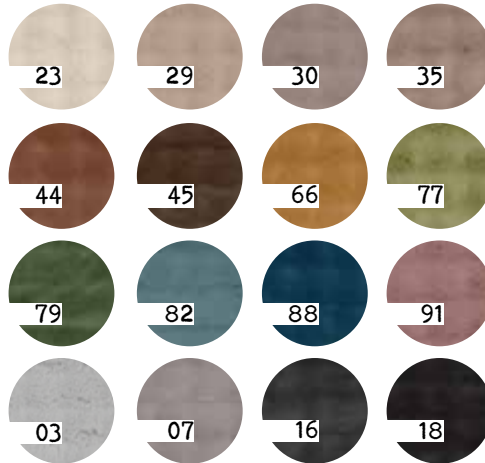












LEO

PFCfree
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX

	WEIGHT 420g/m ² ± 5%
	WORKING WIDTH OF ROLL minimum 140 cm
	COMPOSITION 100% Polyester
	ABRASION RESISTANCE 50 000
	PILLING RESISTANCE 4
	COLOUR FASTNESS TO LIGHT 4
	COLOUR FASTNESS TO DRY RUBBING 4
	COLOUR FASTNESS TO WET RUBBING 4
	TEAR GROWTH RESISTANCE-WARP/WEFT 40N/30N
	TENSILE STRENGTH-WARP/WEFT 600N/400N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 2mm/2mm



LARRY

PFC free

no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

300g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100% Polyester



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

35N/40N




TENSILE STRENGTH-WARP/WEFT

350N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3,5mm

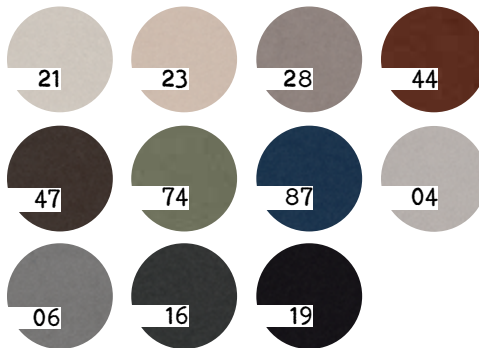



STRUCTURAL

BALDAR

PFC free

no perfluorocarbon



STANDARD 100

SH015 129432
TESTEX



WEIGHT

390g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100% PES



ABRASION RESISTANCE

70 000



PILLING RESISTANCE

3-4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/40N




TENSILE STRENGTH-WARP/WEFT

1917N/755N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3,5mm/3,5mm

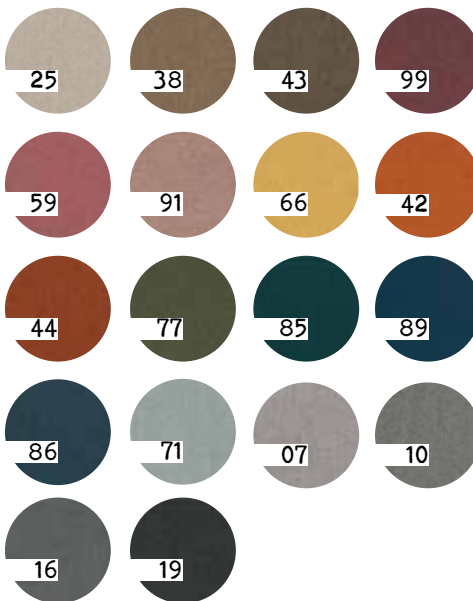

BJORN

PFC free

no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

360g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

50 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

80N/80N




TENSILE STRENGTH-WARP/WEFT

700N/700N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT



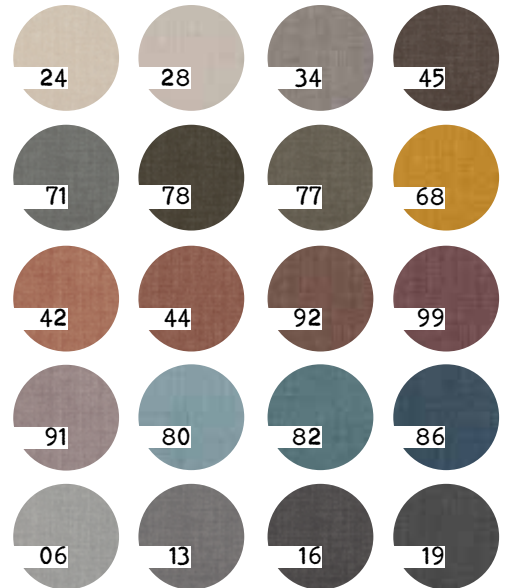





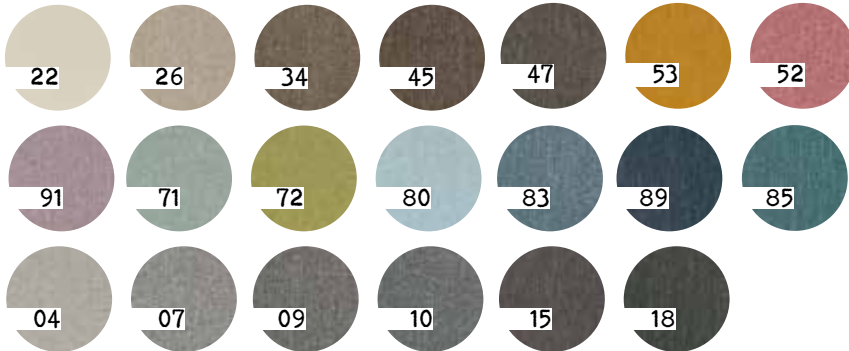


2,5mm/2,5mm




ARNE

	WEIGHT
	390g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	80%PES/20%RA
	ABRASION RESISTANCE
	45 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	153N/104N
	TENSILE STRENGTH-WARP/WEFT
	1000N/1000N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	4mm/4mm



-  **WEIGHT**
380g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
30 000
-  **PILLING RESISTANCE**
4-5
-  **COLOUR FASTNESS TO LIGHT**
4
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
60N/40N
-  **TENSILE STRENGTH-WARP/WEFT**
1500N/700N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
3mm/3mm

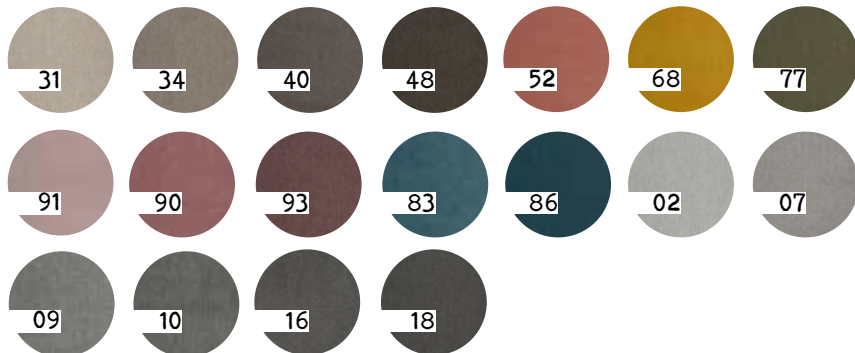

FJORD

PFC free

no perfluorocarbon



STANDARD
100
SHO IS 129432
TESTEX



WEIGHT

280g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

92%PES/8%PA



ABRASION RESISTANCE

100 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

30N/30N




TENSILE STRENGTH-WARP/WEFT


600N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4mm/4mm

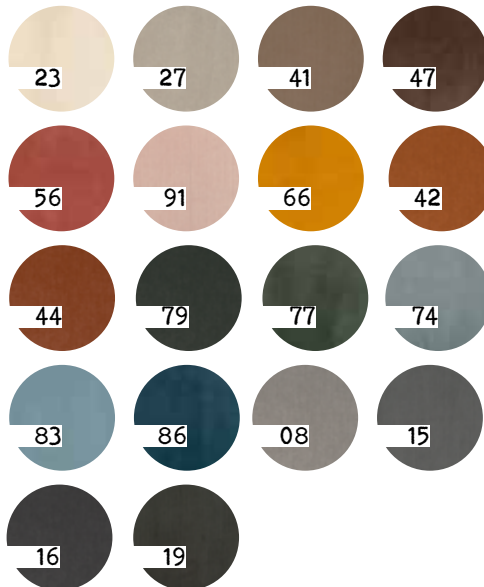

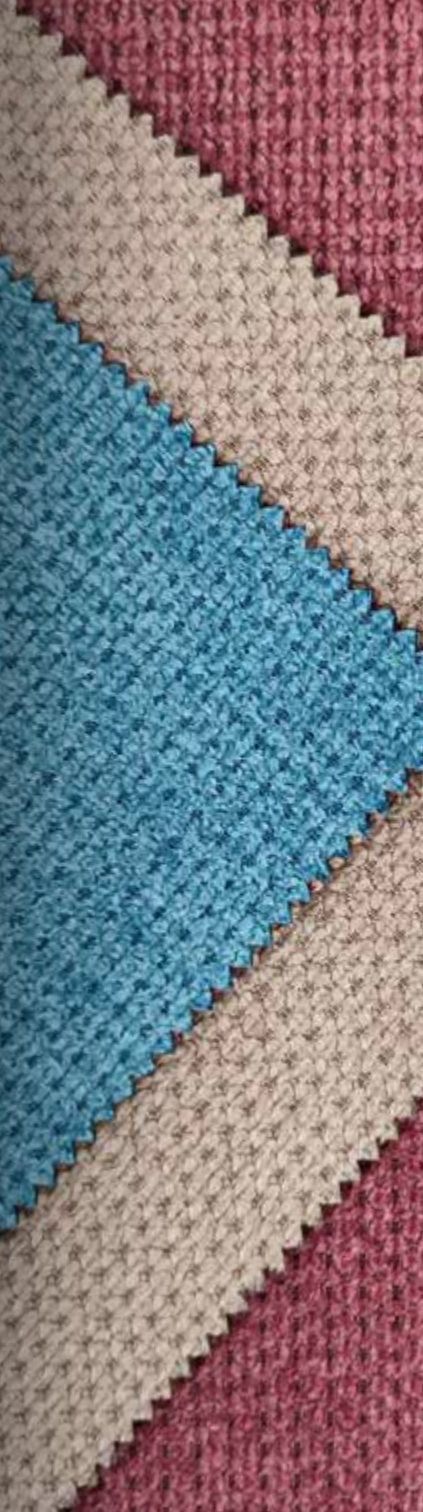












VARDO












PFC free
no perfluorocarbon


STANDARD
100
SH015 129432
TESTEX

-  **WEIGHT**
370g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
92%PES/8%PA
-  **ABRASION RESISTANCE**
50 000
-  **PILLING RESISTANCE**
4-5
-  **COLOUR FASTNESS TO LIGHT**
4
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
50N/55N
-  **TENSILE STRENGTH-WARP/WEFT**
839N/599N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
3mm/3mm



HEVRE

	WEIGHT
	480g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100%PES
	ABRASION RESISTANCE
	60 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	5
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT
	100N/100N
	TENSILE STRENGTH-WARP/WEFT
	600N/600N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/3,5mm

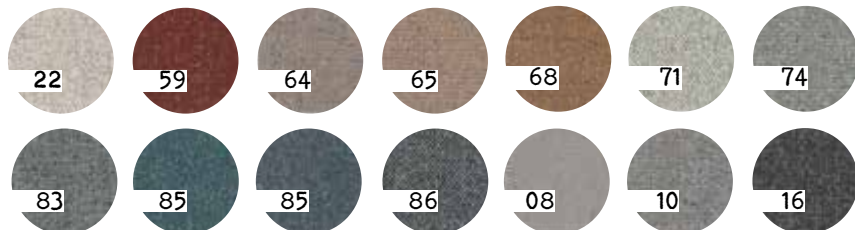



WEIGHT
480g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
90%PES+10%PAN



ABRASION RESISTANCE
50 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
5



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4-5



TEAR GROWTH RESISTANCE-WARP/WEFT
100N/80N



TENSILE STRENGTH-WARP/WEFT
700N/600N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
3,5mm/2,5mm



NOLIO



24



32



35



36



91




66



68



57



76




77



84




85




89




07



08



12



13



STANDARD
100
SH015 129432
TESTEX

PFC^{free}

no perfluorocarbon



RAGO

PFCfree

no perfluorocarbon

OEKO
TEX®

STANDARD
100

SH015 129432
TESTEX



WEIGHT

275g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

92%PES+8%PA



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

60N/50N




TENSILE STRENGTH-WARP/WEFT

700N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3,5mm/3,5mm

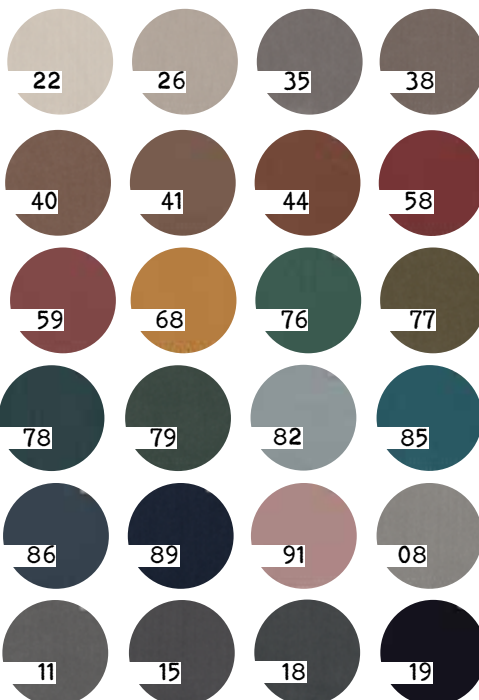














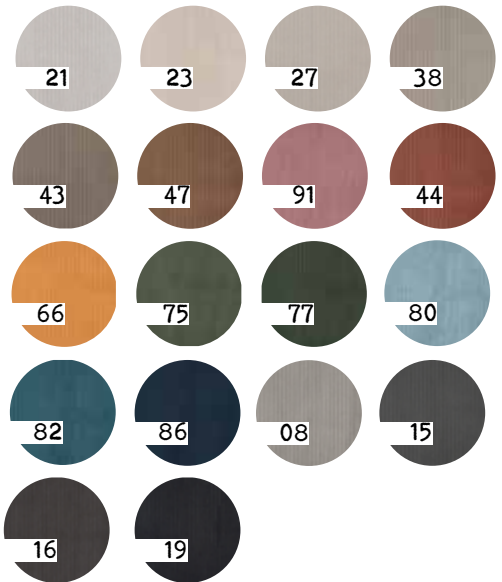
HYPHER

PFC free
no perfluorocarbon




STANDARD
100
SH015 129432
TESTEX

-  **WEIGHT**
340g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
92%PES+8%PA
-  **ABRASION RESISTANCE**
50 000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4-5
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
60N/60N
-  **TENSILE STRENGTH-WARP/WEFT**
700N/600N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
4mm/4mm



TED

	WEIGHT
	400g/m2 ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100% Polyester
	ABRASION RESISTANCE
	60 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	5
	COLOUR FASTNESS TO DRY RUBBING
	4
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	60N/60N
	TENSILE STRENGTH-WARP/WEFT
	600N/600N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/4mm

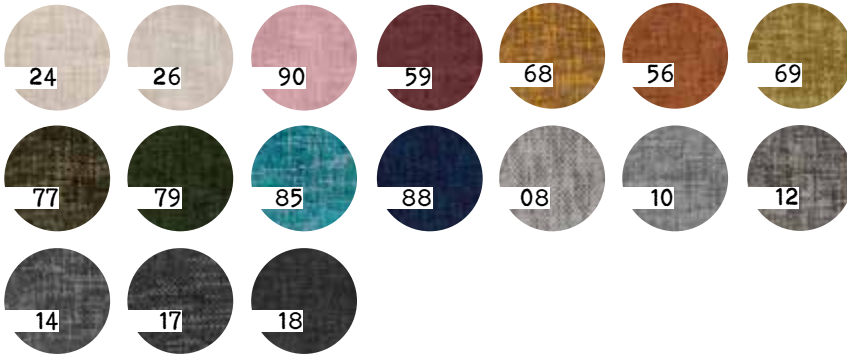



WEIGHT
290g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
100% Polyester



ABRASION RESISTANCE
40 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
4



COLOUR FASTNESS TO DRY RUBBING
4-5



COLOUR FASTNESS TO WET RUBBING
4



TEAR GROWTH RESISTANCE-WARP/WEFT
60N/50N




TENSILE STRENGTH-WARP/WEFT
600N/600N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
2,5mm/2,5mm



LUMOS

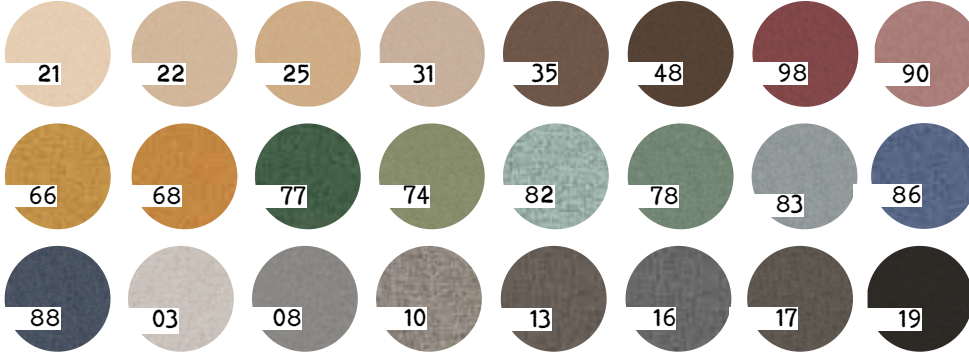

LORD

PFC free

no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX



WEIGHT

360g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

95%PES/5%PA



ABRASION RESISTANCE

40 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/50N




TENSILE STRENGTH-WARP/WEFT

700N/450N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3mm/3mm

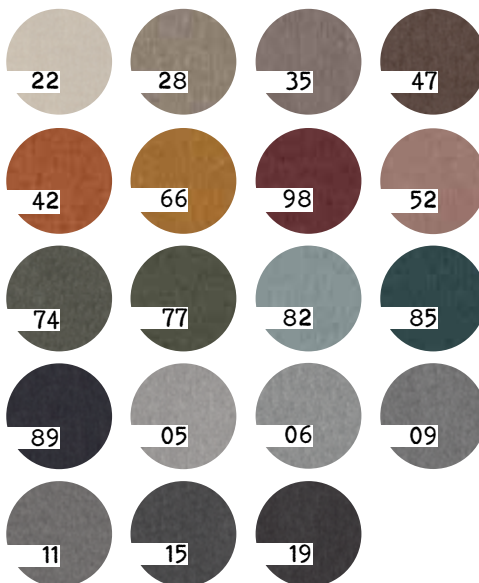














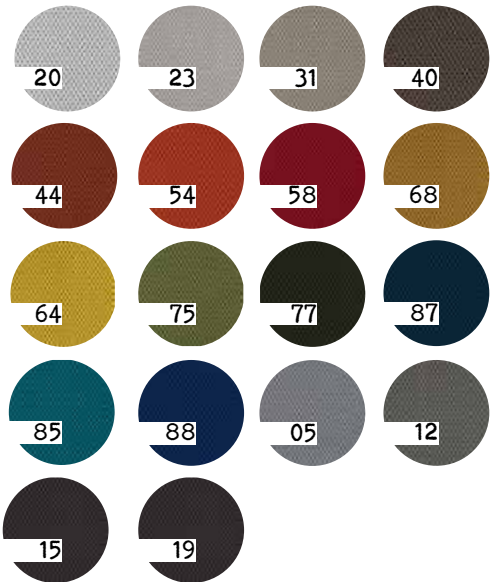
SONIC

PFC free
no perfluorocarbon




STANDARD
100
SH015 129432
TESTEX












-  **WEIGHT**
550g/m² ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100%PES
-  **ABRASION RESISTANCE**
60 000
-  **PILLING RESISTANCE**
4-5
-  **COLOUR FASTNESS TO LIGHT**
4-5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4-5
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
60N/60N
-  **TENSILE STRENGTH-WARP/WEFT**
480N/600N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
3mm/3mm

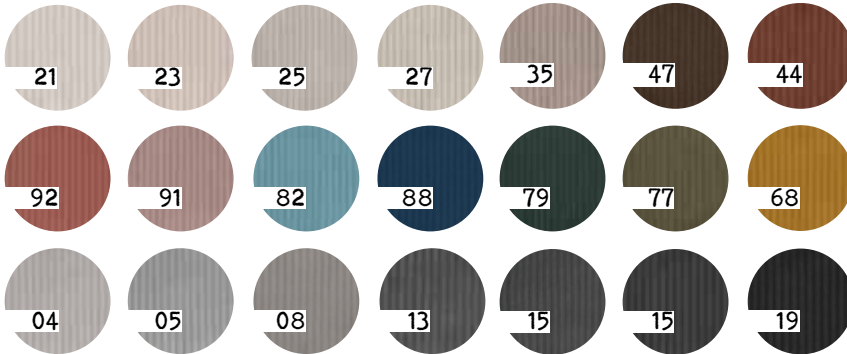


HYDRA

	WEIGHT
	WORKING WIDTH OF ROLL
	COMPOSITION
	ABRASION RESISTANCE
	PILLING RESISTANCE
	COLOUR FASTNESS TO LIGHT
	COLOUR FASTNESS TO DRY RUBBING
	COLOUR FASTNESS TO WET RUBBING
	TEAR GROWTH RESISTANCE-WARP/WEFT
	TENSILE STRENGTH-WARP/WEFT
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT





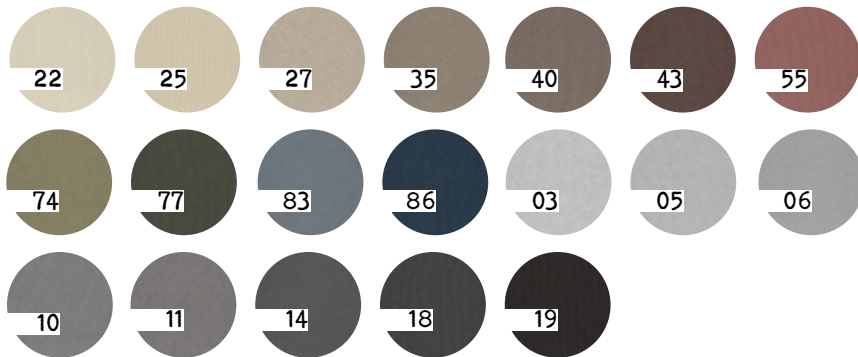








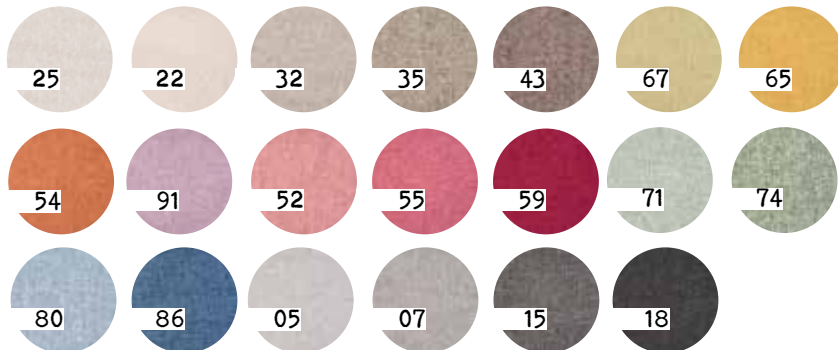
-  **WEIGHT**
350g/m2 ± 5%
-  **WORKING WIDTH OF ROLL**
minimum 140 cm
-  **COMPOSITION**
100% Polyester
-  **ABRASION RESISTANCE**
40000
-  **PILLING RESISTANCE**
4
-  **COLOUR FASTNESS TO LIGHT**
4-5
-  **COLOUR FASTNESS TO DRY RUBBING**
4-5
-  **COLOUR FASTNESS TO WET RUBBING**
4-5
-  **TEAR GROWTH RESISTANCE-WARP/WEFT**
60N/60N
-  **TENSILE STRENGTH-WARP/WEFT**
600N/600N
-  **RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT**
4mm/3,5mm



FLAT WEAVES

NORN

	WEIGHT
	330g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100%PES
	ABRASION RESISTANCE
	50 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT
	90N/90N
	TENSILE STRENGTH-WARP/WEFT
	1100N/700N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/3mm





WEIGHT

230g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100% PES



ABRASION RESISTANCE

35 000



PILLING RESISTANCE

4-5



COLOUR FASTNESS TO LIGHT

4



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

87N/89N



TENSILE STRENGTH-WARP/WEFT

1050N/947N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

4-5mm/4-5mm



GANDAR

fabb

PFCfree
no perfluorocarbon



STANDARD
100
SH015 129432
TESTEX

WATERfree
productions



WEIGHT
245g/m² ± 5%



WORKING WIDTH OF ROLL
minimum 140 cm



COMPOSITION
100% PES



ABRASION RESISTANCE
50 000



PILLING RESISTANCE
4



COLOUR FASTNESS TO LIGHT
4-5



COLOUR FASTNESS TO DRY RUBBING
4



COLOUR FASTNESS TO WET RUBBING
4




TEAR GROWTH RESISTANCE-WARP/WEFT
40N/40N



TENSILE STRENGTH-WARP/WEFT
400N/400N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
4mm/4,5mm

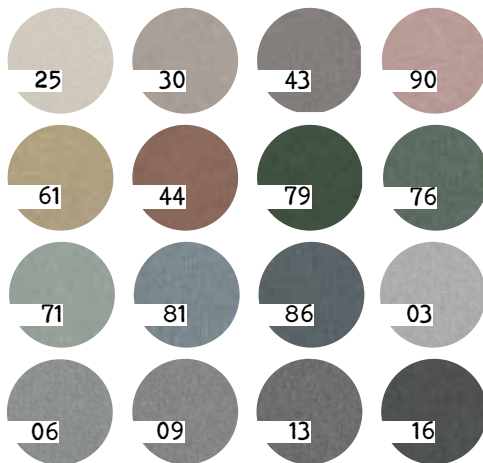












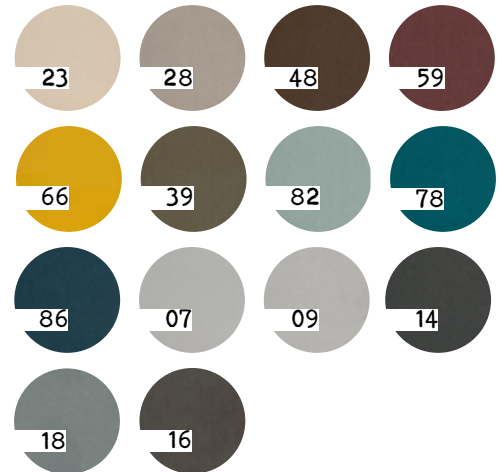
DILJA

PFC free
no perfluorocarbon






STANDARD
100
SH015 129432
TESTEX












	WEIGHT 300g/m ² ± 5%
	WORKING WIDTH OF ROLL minimum 140 cm
	COMPOSITION 85%PES/15%PA
	ABRASION RESISTANCE 35 000
	PILLING RESISTANCE 3-4
	COLOUR FASTNESS TO LIGHT 4
	COLOUR FASTNESS TO DRY RUBBING 4-5
	COLOUR FASTNESS TO WET RUBBING 4
	TEAR GROWTH RESISTANCE-WARP/WEFT 58N/47N
	TENSILE STRENGTH-WARP/WEFT 1016N/387N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 3mm/3mm

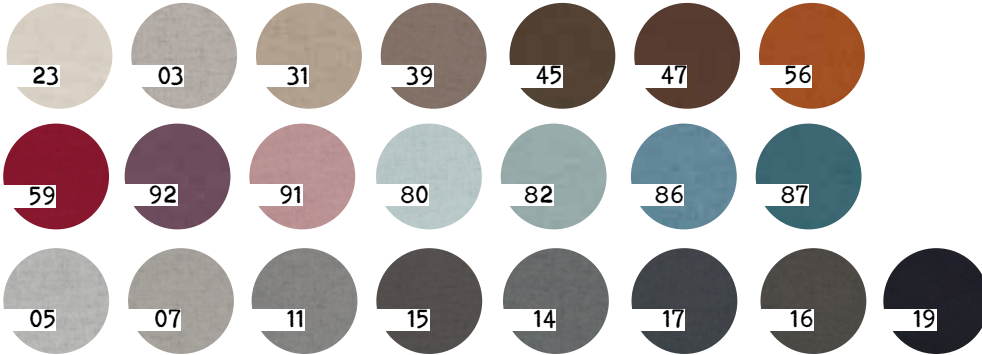

YUCA


	WEIGHT
	300g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100% PES
	ABRASION RESISTANCE
	50 000
	PILLING RESISTANCE
	4-5
	COLOUR FASTNESS TO LIGHT
	4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT
	50N/35N
	TENSILE STRENGTH-WARP/WEFT
	696N/544N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	4mm/4mm



	WEIGHT 245g/m2 ± 5%
	WORKING WIDTH OF ROLL minimum 140 cm
	COMPOSITION 100%PES
	ABRASION RESISTANCE 50 000
	PILLING RESISTANCE 4-5
	COLOUR FASTNESS TO LIGHT 4
	COLOUR FASTNESS TO DRY RUBBING 4-5
	COLOUR FASTNESS TO WET RUBBING 4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT 74N/78N
	TENSILE STRENGTH-WARP/WEFT 1153N/1250N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 4mm/4mm



SAVIO

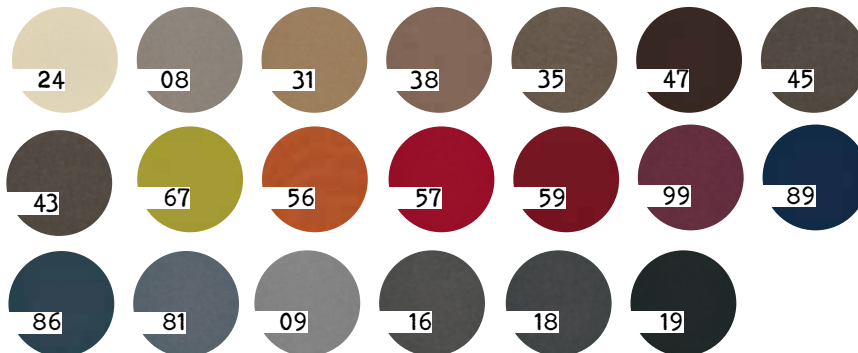

OTIS

PFC free

no perfluorocarbon

OEKO
TEX®

STANDARD
100
SH015 129432
TESTEX

WATER free

productions



WEIGHT

215g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



COMPOSITION

100%PES



ABRASION RESISTANCE

100 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4



COLOUR FASTNESS TO WET RUBBING

4



TEAR GROWTH RESISTANCE-WARP/WEFT

40N/30N




TENSILE STRENGTH-WARP/WEFT

600N/350N



RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

3,5mm/3,5mm

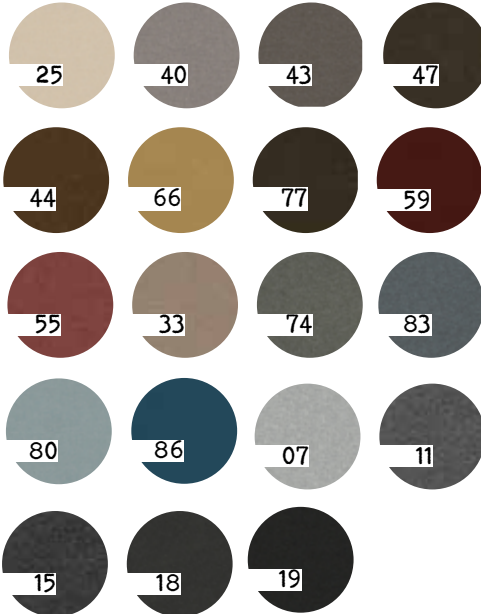


COLET

PFCfree
no perfluorocarbon








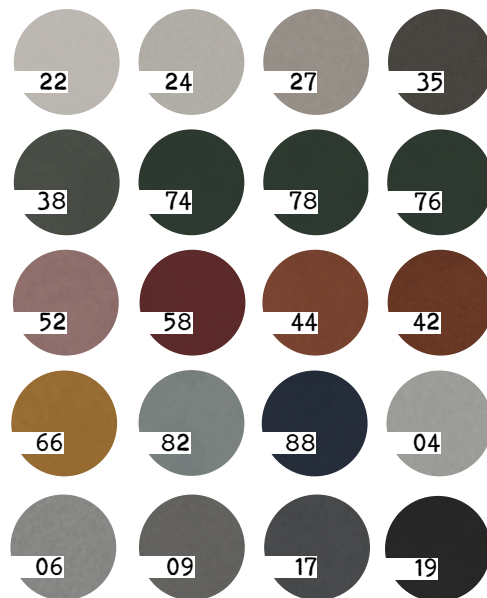





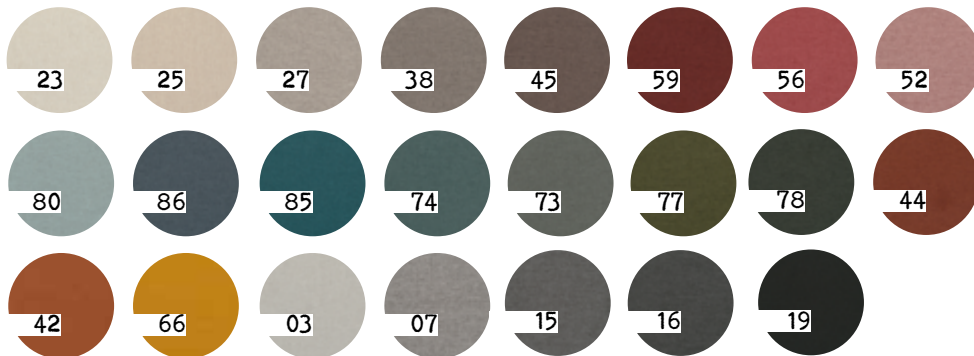
STANDARD
100
SH015 129432
TESTEX

	WEIGHT 260g/m ² ± 5%
	WORKING WIDTH OF ROLL minimum 140 cm
	COMPOSITION 100%PES
	ABRASION RESISTANCE 40 000
	PILLING RESISTANCE 4
	COLOUR FASTNESS TO LIGHT 4
	COLOUR FASTNESS TO DRY RUBBING 4-5
	COLOUR FASTNESS TO WET RUBBING 4-5
	TEAR GROWTH RESISTANCE-WARP/WEFT 40N/40N
	TENSILE STRENGTH-WARP/WEFT 760N/600N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT 4mm/4mm



NEA

	WEIGHT
	350g/m ² ± 5%
	WORKING WIDTH OF ROLL
	minimum 140 cm
	COMPOSITION
	100%PES
	ABRASION RESISTANCE
	60 000
	PILLING RESISTANCE
	4
	COLOUR FASTNESS TO LIGHT
	4
	COLOUR FASTNESS TO DRY RUBBING
	4-5
	COLOUR FASTNESS TO WET RUBBING
	4
	TEAR GROWTH RESISTANCE-WARP/WEFT
	60N/45N
	TENSILE STRENGTH-WARP/WEFT
	1000N/500N
	RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT
	3mm/3mm



OEKO
TEX®

STANDARD
100
SH015 129432
TESTEX

PFC free
no perfluorocarbon



WEIGHT

500g/m² ± 5%



WORKING WIDTH OF ROLL

minimum 140 cm



97%Polyester 3%Linen



ABRASION RESISTANCE

60 000



PILLING RESISTANCE

4



COLOUR FASTNESS TO LIGHT

4-5



COLOUR FASTNESS TO DRY RUBBING

4-5



COLOUR FASTNESS TO WET RUBBING

4-5



TEAR GROWTH RESISTANCE-WARP/WEFT

120N/100N



TENSILE STRENGTH-WARP/WEFT

1000N/800N




RESISTANCE TO SEAM SLIPPAGE-WARP/WEFT

2,5mm/2mm



LINS

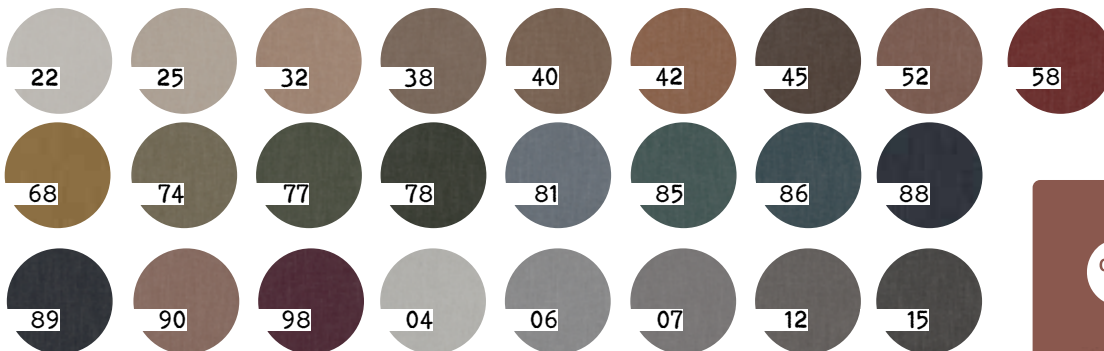

fabb®

fabb.pl

